


AIR-OPERATED PUMP ELEVATORS

The pump elevators are available in single column (with or without basement) or twin column version.

It is raised by compressed air, via the side mounted 3-way valve that allows to change the drum easily and quickly.

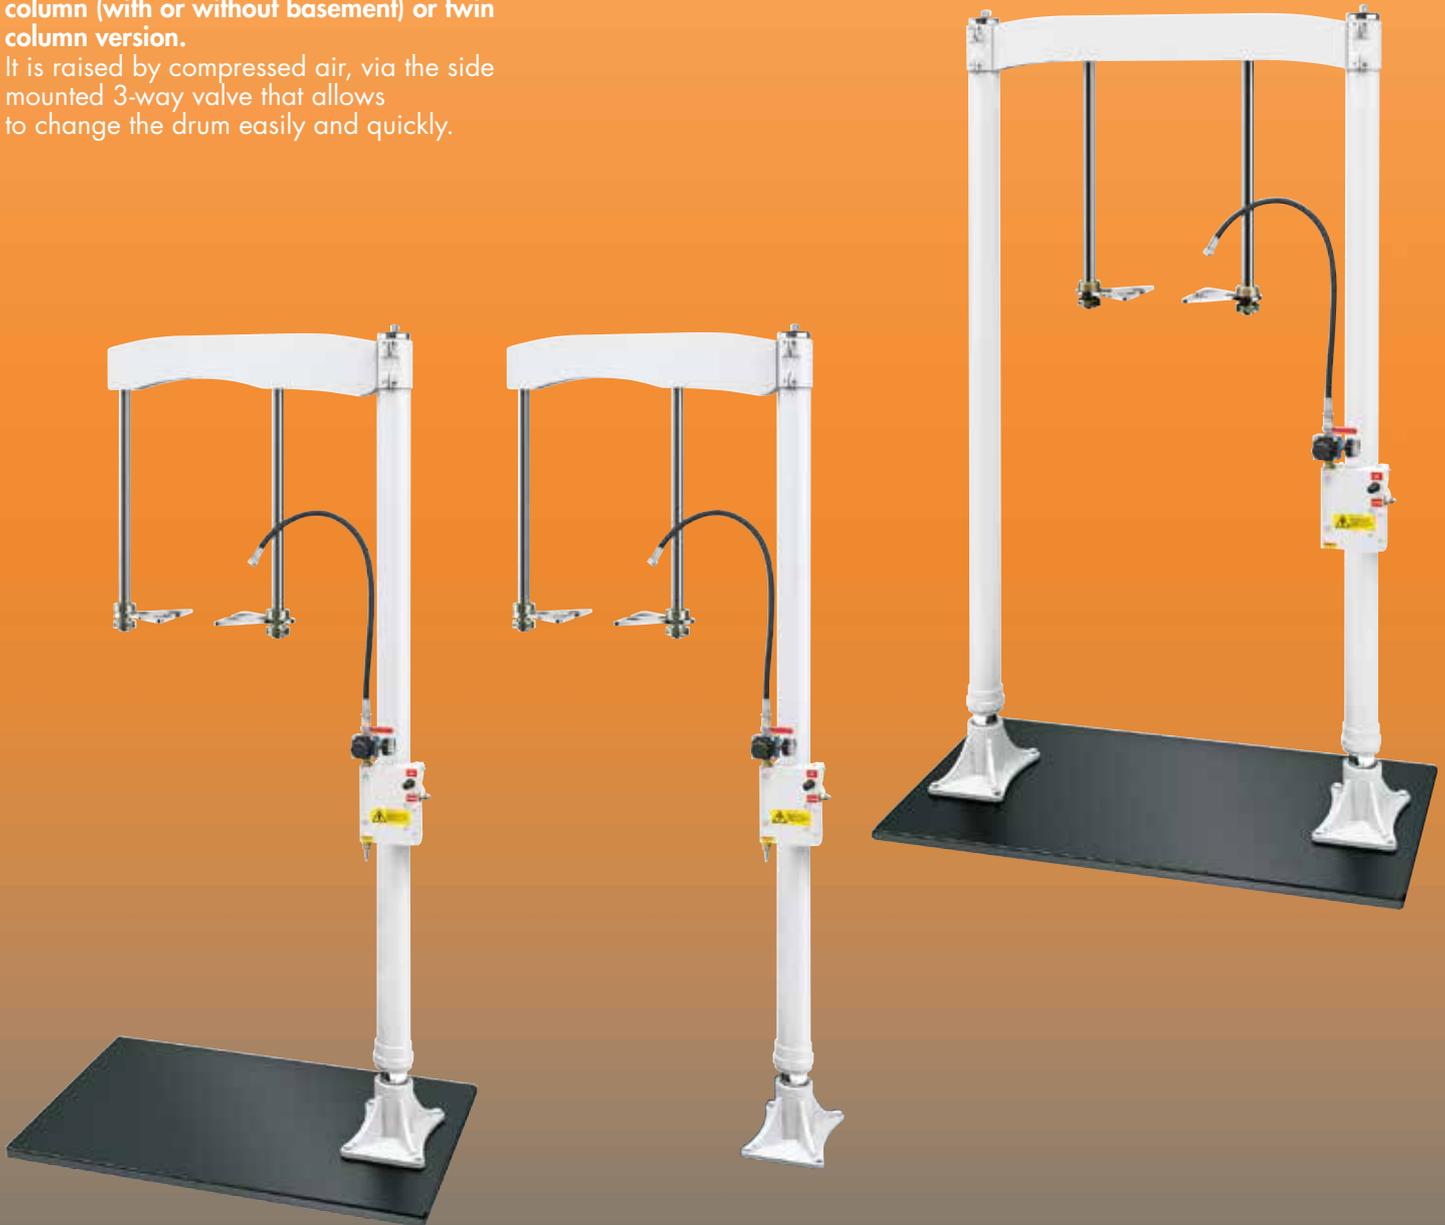

P/N	OE10/80	OE10/81	OE10/82
Column	1 with basement	1 without basement	2 with basement
Suitable for drums	180 ÷ 220 kg	180 ÷ 220 kg	180 ÷ 220 kg
Working temperature	+2 ÷ +40 °C	+2 ÷ +40 °C	+2 ÷ +40 °C
Max pressure	8 bar	8 bar	8 bar
Usable pumps	s. 600 - 700 - 900 1200 - 1500 - 1800	s. 600 - 700 - 900 1200 - 1500 - 1800	s. 600 - 700 - 900 1200 - 1500 - 1800
Noise level	negligible (< 70 db)	negligible (< 70 db)	negligible (< 70 db)
Packing - Gross weight	 N° 1 1,16 m³  97 kg	 N° 1 0,68 m³  75 kg	 N° 1 1,41 m³  128 kg
Height max/min (A - B)	2750 - 1750 mm	2715 - 1715 mm	2750 - 1750 mm
Dimensions (C - D)	866 - 630 mm	140 - 255 mm	1086 - 630 mm

