
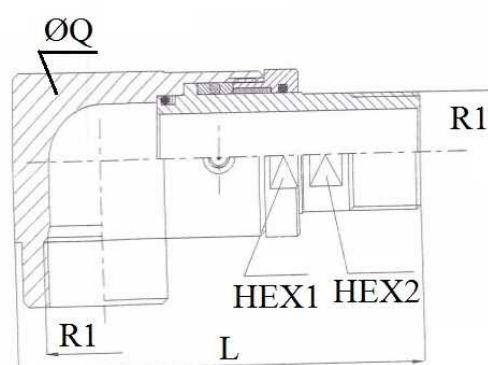


Elbow 90° swivel female TrAle

Stainless Steel AISI 316-L

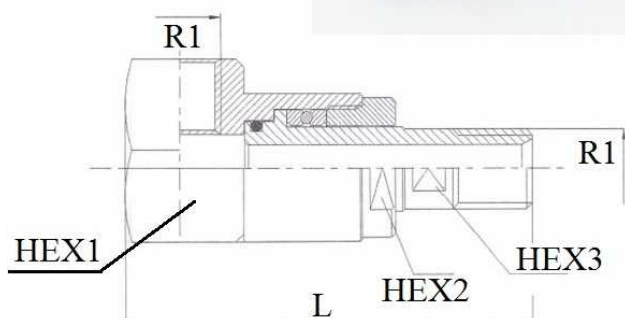

Temperature: -15°C to +250°C

O-rings FKM

Rotation speed: 5-10 rpm

Part n°	R1	FLOW MAX (l/min)	L	HEX 1	HEX 2	HEX 3	ØQ	Max. static press.
Z GG90 1/4	1/4" BSP	25	78	32	21	11		350
Z GG90 3/8	3/8 " BSP	35	98	36	27	14		300
Z GG90 1/2	1/2" BSP	60	106	46	32	18		300
Z GG90 3/4	3/4 " BSP	100	118	50	41	24		250
Z GG90 1	1" BSP	180	142	60	46	30		250
Z GG90 1 1/4	1" 1/4 BSP	200	155	55	38		60	180
Z GG90 1 1/2	1" 1/2 BSP	250	170	70	41		75	150
Z GG90 2	2 " BSP	300	190	80	55		95	150

Warning: The swivel joints in line and 90 ° are NOT eligible for fast and continuous rotation, but only for angular displacement