


37° Flared Tube Fitting Set Type FI-AB ■ Series L / S

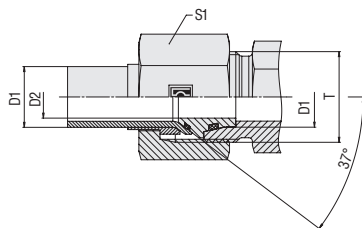

B

Series	Tube OD mm D1	PN bar	Dimensions mm Thread T	D2	S1	Weight kg ca. per 100	Ordering Codes
L	6	500	M 12 x 1,5	3	14	1,74	FI-AB-06L-V-W3
	8	500	M 14 x 1,5	5	17	2,50	FI-AB-08L-V-W3
	10	500	M 16 x 1,5	6	19	3,38	FI-AB-10L-V-W3
	12	400	M 18 x 1,5	8	22	4,83	FI-AB-12L-V-W3
	15	400	M 22 x 1,5	11	27	4,66	FI-AB-15L-V-W3
	18	400	M 26 x 1,5	14	32	10,11	FI-AB-18L-V-W3
	22	250	M 30 x 2	17	36	14,25	FI-AB-22L-V-W3
	28	250	M 36 x 2	23	41	16,47	FI-AB-28L-V-W3
	35	250	M 45 x 2	28	50	25,86	FI-AB-35L-V-W3
	42	250	M 52 x 2	35	60	42,85	FI-AB-42L-V-W3
S	6	630	M 14 x 1,5	3	17	2,51	FI-AB-06S-V-W3
	8	630	M 16 x 1,5	5	19	3,39	FI-AB-08S-V-W3
	10	630	M 18 x 1,5	6	22	4,77	FI-AB-10S-V-W3
	12	630	M 20 x 1,5	8	24	5,63	FI-AB-12S-V-W3
	14	630	M 22 x 1,5	9	27	7,77	FI-AB-14S-V-W3
	16	630	M 24 x 1,5	11	30	10,88	FI-AB-16S-V-W3
	20	400	M 30 x 2	14	36	15,90	FI-AB-20S-V-W3
	25	400	M 36 x 2	19	46	29,34	FI-AB-25S-V-W3
	30	400	M 42 x 2	23	50	33,64	FI-AB-30S-V-W3
	38	400	M 52 x 2	30	60	52,40	FI-AB-38S-V-W3

Ordering Codes

***FI-AB*-15*L*-V*-W3**

* 37° Flared Tube Fitting Set **FI-AB**

* Outside Tube Diameter D1 (in mm) **-15**

* Series Light Series **L**
Heavy Series **S**

* Seal Material FKM (Viton®) **-V**

* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

Spare Parts / Accessories



O-Ring
Type **O-RING**

Page 240

Standard seal material is FKM (Viton®).