

TUBE FITTINGS


ADJUSTABLE FITTINGS



VCDKO ADJUSTABLE EQUAL TEE

With taper and O-ring according to DIN 3865.

O-ring NBR (e.g. Perbunan), FKM (e.g. Viton) upon request.

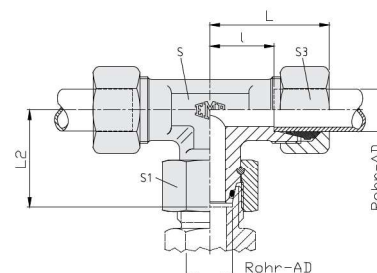

description	pipe OD	PN series	L ₂	L	l	S (A) profile	S (B) forging	S ₁	S ₃	kg / 100 pcs	O-Ring
DS-VCDKO 6-L	6	L 500 (2200)	26.0	27	12.0	12	12	17	14	5.8	4x1.5
DS-VCDKO 8-L	8		27.5	29	14.0	14	12	17	17	7.9	6x1.5
DS-VCDKO 10-L	10		29.0	30	15.0	17	14	19	19	10.1	7.5x1.5
DS-VCDKO 12-L	12	L 400 (1700)	29.5	32	17.0	19	17	22	22	13.5	9x1.5
DS-VCDKO 15-L	15		32.5	36	21.0		19	27	27	23.3	12x2
DS-VCDKO 18-L	18		35.5	40	23.5		24	32	32	33.2	15x2
DS-VCDKO 22-L	22	L 250 (1100)	38.5	44	27.5		27	36	36	44.6	20x2
DS-VCDKO 28-L	28		41.5	47	30.5		36	41	41	70.2	26x2
DS-VCDKO 35-L	35		51.0	56	34.5		41	50	50	96.1	32x2.5
DS-VCDKO 42-L	42	S 800 (3400)	56.0	63	40.0		50	60	60	146.1	38x2.5
DS-VCDKO 6-S	6		27.0	31	16.0		14	17	17	8.7	4x1.5
DS VCDKO 8 S	8		27.5	32	17.0		17	19	19	11.8	6x1.5
DS-VCDKO 10-S	10	S 630 (2700)	30.0	34	17.5		19	22	22	16.3	7.5x1.5
DS-VCDKO 12-S	12		31.0	38	21.5		22	24	24	20.6	9x1.5
DS-VCDKO 14-S	14		35.0	40	22.0		19	27	27	28.1	10x2
DS-VCDKO 16-S	16	S 400 (1700)	36.5	43	24.5		24	30	30	37.3	12x2
DS-VCDKO 20-S	20		44.5	48	26.5		27	36	36	56.8	16.3x2.4
DS-VCDKO 25-S	25		50.0	54	30.0		36	46	46	107.9	20.3x2.4
DS-VCDKO 30-S	30	S 400 (1700)	55.0	62	35.5		41	50	50	136.3	25.3x2.4
DS-VCDKO 38-S	38		63.0	72	41.0		50	60	60	203.6	33.3x2.4

L = approximate length with nut tightened

Pipe OD 6-42 = forging

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on pressure.