


SAE FLH67

SAE 'O' ring flange high-pressure.
Code 62. 67° swept elbow.

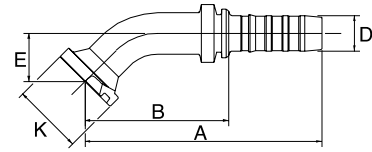


D				↔						
-size	DN	"		A	B	E	K	KIT	KIT	REF.
GS										
-16	25	1	1"	150.9	94.5	51.1	47.8	16 PH-FLH	16FLHCFM	16GS16FLH67M

M: Medium drop per ISO 12151-3. / Details on flange kits see page 250.

SAE FLH90S

SAE 'O' ring flange high-pressure.
Code 62. 90° swept elbow. Short drop.

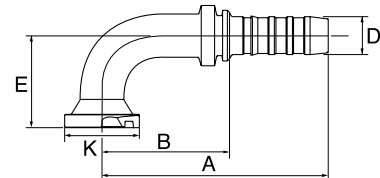

D				↔						
-size	DN	"		A	B	E	K	KIT	KIT	REF.
GS										
-12	20	3/4	1/2"	102.0	51.0	40.0	31.8	8 PH-FLH		12GS8FLH90-040
-16	25	1	1"	135.0	78.6	61.0	47.6	16 PH-FLH	16FLHCFM	16GS16FLH90S
-16	25	1	1.1/4"	134.0	76.8	68.0	54.0	20 PH-FLH	20FLHCFM	16GS20FLH90S
-16	25	1	1.1/2"	134.0	77.2	81.0	63.5	24 PH-FLH	24FLHCFM	16GS24FLH90S
-20	32	1.1/4	1"	160.0	88.9	61.0	47.6	16 PH-FLH		20GS16FLH90S
-20	32	1.1/4	1.1/2"	165.0	93.9	81.0	63.5	24 PH-FLH	24FLHCFM	20GS24FLH90S

S: Short drop per ISO 12151-3. / Details on flange kits see page 250.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.