

Ratio 1:1
Flow rate 23 l/min





P/N OE33070

P/N OE33073

AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 600

P/N	OE33070	OE33071	OE33072	OE33073
Seals	Viton®			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminum			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G	F1/2"G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	230	230	230
Noise level	dB	81	81	81
Max deliverable oil viscosity	SAE	80	80	80
Bung adaptor	-	OE38042	-	OE38042
Suitable for drums or tank	modular	customisable 1"	for drums 180 - 220 Kg	for drums 180 - 220 Kg
Packing	No.- m ³	1 - 0,006	1 - 0,006	1 - 0,020
Weight	Kg	4,3	5	6,2
Dimensions (A x B x C)	mm	355 - 0 - 0	355 - 220 - 42	355 - 940 - 42

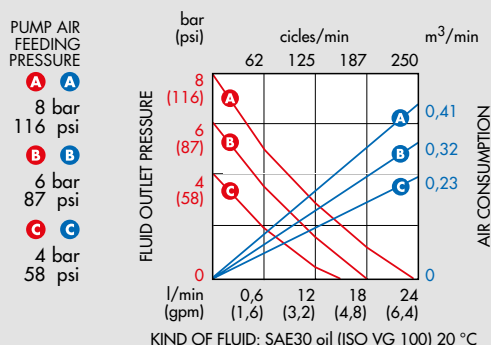

Ratio 1:1
Flow rate 40 l/min



P/N OE33170

P/N OE33173

AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 650

P/N	OE33170	OE33171	OE33172	OE33173
Seals	Viton®			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminum			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F3/4"G	F3/4"G	F3/4"G	F3/4"G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	370	370	370
Noise level	dB	81	81	81
Max deliverable oil viscosity	SAE	130	130	130
Bung adaptor	-	OE38042	-	OE38042
Suitable for drums or tank	modular	customisable 1"	for drums 180 - 220 Kg	for drums 180 - 220 Kg
Packing	No.- m ³	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	5,3	6	7,3
Dimensions (A x B x C)	mm	505 - 0 - 0	505 - 245 - 42	505 - 940 - 42

