


37° - FLARED TUBE CONNECTORS

102210

Connector swivel female JIC - male Metric with elastomer seal ISO 9974 ports

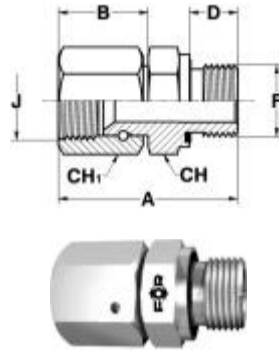

T		RIFERIMENTO REFERENCE	J	F	A	B	D	CH	CH₁
MM.	IN.								
6	1/4	A102210-0610	7/16-20 UNF-2A	M10x1-6g	34,5	18,5	8	14	14
6	1/4	A102210-0612	7/16-20 UNF-2A	M12x1,5-6g	39,5	18,5	12	17	14
8	5/16	A102210-0810	1/2-20 UNF-2A	M10x1-6g	36,5	20,5	8	14	17
8	5/16	A102210-0812	1/2-20 UNF-2A	M12x1,5-6g	41,5	20,5	12	17	17
10	3/8	A102210-1014	9/16-18 UNF-2A	M14x1,5-6g	43,5	21,5	12	19	17
10	3/8	A102210-1016	9/16-18 UNF-2A	M16x1,5-6g	43,5	21,5	12	22	17
12	1/2	A102210-1216	3/4-16 UNF-2A	M16x1,5-6g	45	23	12	22	22
12	1/2	A102210-1218	3/4-16 UNF-2A	M18x1,5-6g	45,5	23	12	24	22
14÷16	5/8	A102210-1618	7/8-14 UNF-2A	M18x1,5-6g	48,5	26	12	24	27
14÷16	5/8	A102210-1622	7/8-14 UNF-2A	M22x1,5-6g	51,5	26	14	27	27
18-20	3/4	A102210-2022	1"1/16-12 UN-2A	M22x1,5-6g	54	27,5	14	27	32
18-20	3/4	A102210-2027	1"1/16-12 UN-2A	M27x2-6g	57,5	27,5	16	32	32
25	1"	A102210-2527	1"5/16-12 UN-2A	M27x2-6g	60	30	16	36	38
25	1"	A102210-2533	1"5/16-12 UN-2A	M33x2-6g	63	30	18	41	38
30-32	1"1/4	A102210-3242	1"5/8-12 UN-2A	M42x2-6g	69,5	32,5	20	50	50
38	1"1/2	A102210-3848	1"7/8-12 UN-2A	M48x2-6g	78,5	38	22	55	57

FOR S.P.A. - NORME E DIMENSIONI SOGGETTE A MODIFICHE SENZA PREAVVISO.

FOR S.P.A. - DESIGN DETAILS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.