

APOLLO SUPERFLEX 2




+50° C

-40° C

Black PVC/NBR hose reinforced with a grey anti-shock rigid PVC spiral. Special formulation conceived for keeping the flexibility at extreme temperatures, better than similar PVC hoses commonly used; profile with a slightly protruding spiral to guarantee an easy dragging on the ground.

Antistatic version with copper wire on request.

• Waste Management, agriculture:suction and transport of liquids.

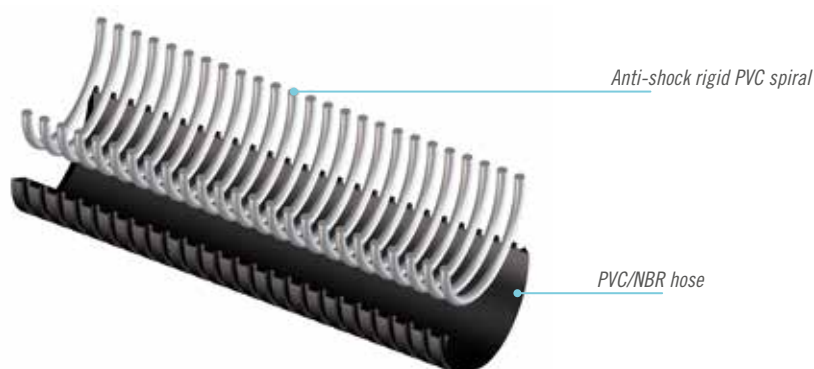

Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
0114181050	50,8	4,4	4,91	970	2	10	7	160	50	0,262
0114181063	63,5	4,9	5,5	1380	1,8	9	7	210	50	0,429
	65*	5	5,6	1440	1,8	9	7	210	50	0,439
0114181075	76,2	5,1	5,8	1670	1,8	9	7	250	50	0,632
	80	5,1	6,8	1930	1,5	7,5	7	270	50	0,674
0114181090	90	5,2	7,0	2220	1,5	7,5	7	300	30	0,599
0114181100	102	5,9	7,6	2770	1,3	6,5	6	335	30	0,675
	105*	6	7,6	2870	1,3	6,5	6	335	30	0,692
	110	6,1	7,6	2990	1,2	6	6	360	30	0,721
0114181125	127	6,3	7,8	3540	1,1	6	6	410	30	1,095
0114181150	152,4	7,4	9	5000	0,9	5	6	500	20	1,309

*Available on request, contact our sales office for more info and quantities

The technical data here reported were measured at 23°C with 50% humidity