
Spin-On Elements ▪ Type SF-65



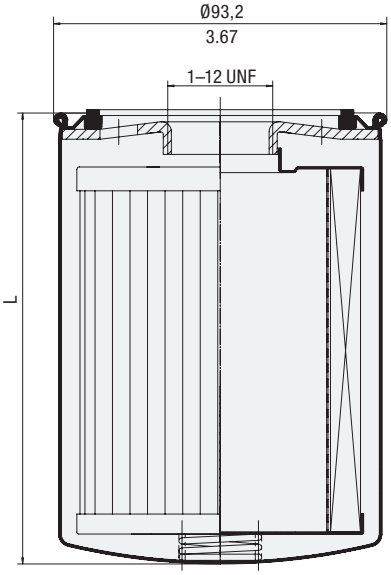

Dimensions in mm / in

Product Description

STAUFF SF-65-series Spin-On Elements are used with the STAUFF SAF series Spin-On Filters.

F

Technical Data

Connection Thread
- 1–12 UNF

Seal Contour
- Type A (see page 151)

Sealing Material
- NBR (Buna-N®)

Operating Pressure
- Max. 14 bar / 200 PSI
- SF-6520-W: Max. 7 bar / 101.5 PSI

Differential Pressure
- Max. 5,5 bar / 80 PSI
  (for any application without bypass valve)

Burst Pressure
- Min. 20 bar / 290 PSI

Temperature Range
- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility
- Mineral oils, other fluids on request

Dimensions

	Filter Paper				Inorganic Glass Fibre			Water Absorbing
Order Code	**SF-6520**	**SF-6521**	**SF-6510**	**SF-6511**	**SF-6549**	**SF-6505**	**SF-6504**	**SF-6520-W**
	10µm	10µm	25µm	25µm	3µm	12µm	25µm	10µm water absorb
Length L (mm/in)	137 5.39	204 8.00	137 5.39	204 8.00	137 5.39	137 5.39	137 5.39	133 5.25
ß-Ratio	$ß_{10} \geq 2$	$ß_{10} \geq 2$	$ß_{25} \geq 2$	$ß_{25} \geq 2$	$ß_{3} \geq 200$	$ß_{12} \geq 200$	$ß_{25} \geq 200$	$ß_{10} \geq 2$
Dirt Holding Capacity ACFTD (g)	14.4	22	20.4	31.2	19	11	26	Water holding capacity 162 ml 5.5 oz
Carton Quantity	12	12	12	12	12	12	12	12
Carton Weight (kg/lbs)	6,3 13.9	8,4 18.5	6,4 14.2	8,8 19.4	8,6 19	8,6 19	8,6 19	8,6 19