


UNF MBX90

Male SAE 'O' ring boss swivel.

SAE J1926/3. ISO 11926/3 light duty (L series).

90° swept elbow.



D				A	B	E	H1	REF.
-size	DN	"		mm	mm	mm	mm	G
-6	10	3/8	9/16" - 18 UNF	62.8	34.8	63.1	22.0	6G6MBX90
-8	12	1/2	3/4" - 16 UNF	80.3	42.9	70.1	24.0	8G8MBX90
-8	12	1/2	7/8" - 14 UNF	80.3	42.9	71.6	27.0	8G10MBX90
-8	12	1/2	1.1/16" - 12 UN	80.3	42.9	73.6	32.0	8G12MBX90
-12	20	3/4	1.1/16" - 12 UN	110.1	59.1	86.8	32.0	12G12MBX90


Note: Internal seal rings are NBR material. Coupling cannot be swivelled under pressure. Not to be used as a live swivel.

UNF MBX90BL

Male SAE 'O' ring boss swivel.

SAE J1926/3. ISO 11926/3 light duty (L series).

90° block elbow.

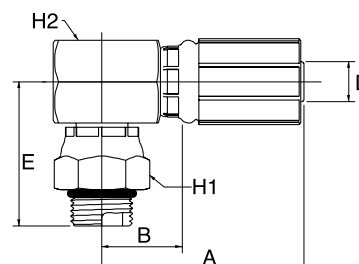

D				A	B	E	H1	H2	REF.
-size	DN	"		mm	mm	mm	mm	mm	G
-4	6	1/4	9/16" - 18 UNF	46.3	20.2	41.7	22.2	17.5	4G6MBX90BL
-6	10	3/8	3/4" - 16 UNF	49.7	21.8	41.3	25.4	19.1	6G8MBX90BL
-6	10	3/8	7/8" - 14 UNF	49.7	21.8	42.8	25.4	19.1	6G10MBX90BL
-8	12	1/2	3/4" - 16 UNF	77.1	27.2	44.4	25.4	25.4	8G8MBX90BL
-8	12	1/2	7/8" - 14 UNF	77.1	27.2	39.6	25.4	25.4	8G10MBX90BL
-10	16	5/8	7/8" - 14 UNF	60.9	23.4	39.6	25.4	25.4	10G10MBX90BL
-12	20	3/4	1.1/16" - 12 UN	96.0	29.7	60.6	33.3	34.9	12G12MBX90BL

Note: Internal seal rings are NBR material. Coupling cannot be swivelled under pressure. Not to be used as a live swivel.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.