



NBR: -10°C ÷ 95°C
FKM: -20°C ÷ 205°C
Standard version: NBR
Stainless steel AISI 316 version:
FKM



Working pressure:
200 Bar (max)



CRHL12 & CRHL12R:
Compressed air and fluids
suitable with construction
materials
CRHL12-303 & CRHL-303R:
Compressed air, water,
industrial soaps, applications
in oxidising or corrosive
environments and fluids suitable
with construction materials
CRHL12-316 & CRHL12-316R:
Compressed air, water, grease,
oils, mild acids, applications
in highly oxidising or corrosive
environments and fluids suitable
with construction materials




Parallel gas BSPP ISO 228
from G1/4" to G1/2"

NOMINAL DIAMETER

12,1 mm

CONFIGURATIONS



PL
Free
Passage



Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863



COMPONENTS	CRHL12 & CRHL12-R	CRHL12-303 & CRHL12-R-303	CRHL12-316 & CRHL12-R-316
Body	Brass	Stainless steel AISI 303	Stainless steel AISI 316
Slide	Nickel-plated steel	Stainless steel AISI 303	Stainless steel AISI 316
Slide support	EPDM BLACK (CRHL12R)	EPDM BLACK (CRHL12-303R)	EPDM BLUE (CRHL12-316R)
Spring	Stainless steel AISI 302	Stainless steel AISI 302	Stainless steel AISI 302
Ball	Stainless steel AISI 316	Stainless steel AISI 316	Stainless steel AISI 316
Retaining ring	Stainless steel AISI 302	Stainless steel AISI 302	Stainless steel AISI 302
Seal	NBR - FKM	NBR - FKM	NBR - FKM


CONNECTION	ACRHL12	ACRHL12-303	ACRHL12-316
Body	Nickel-plated steel	Stainless steel AISI 303	Stainless steel AISI 316

VIEW - QUICK COUPLING CRHL12-R-H



CRHL12-M

Male quick coupling BSPP thread




CODE	T	ØP	L	H
CRHL12-M12G-303	G 1/2"	32,0	49,6	27
CRHL12-M12G-316	G 1/2"	32,0	49,6	27

CRHL12-M
Supplied with NBR seal

CRHL12-R-M

Male quick coupling with rubber cover BSPP thread




CODE	T	ØP	L	H
CRHL12-M12G-303R	G 1/2"	44,0	57,6	27
CRHL12-M12G-316R	G 1/2"	44,0	57,6	27

CRHL12-R-M
Supplied with NBR seal

CRHL12-H

Female quick coupling BSPP thread




CODE	T	ØP	L	H
CRHL12-H38	G 3/8"	32,0	40,7	27
CRHL12-H38-303	G 3/8"	32,0	40,7	27
CRHL12-H38-316	G 3/8"	32,0	40,7	27
CRHL12-H12	G 1/2"	32,0	46,1	27
CRHL12-H12-303	G 1/2"	32,0	46,1	27
CRHL12-H12-316	G 1/2"	32,0	46,1	27



CRHL12-R-H


Female quick coupling with rubber cover BSPP thread

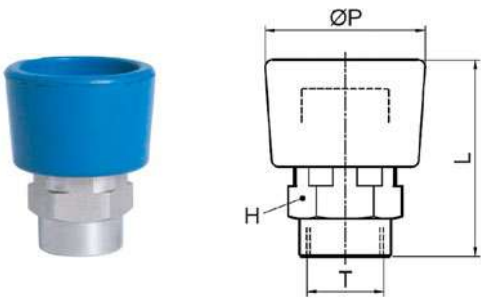

CODE	T	ØP	L	H
CRHL12-H38R	G 3/8"	44,0	48,7	27
CRHL12-H38-303R	G 3/8"	44,0	48,7	27
CRHL12-H38-316R	G 3/8"	44,0	48,7	27
CRHL12-H12R	G 1/2"	44,0	54,1	27
CRHL12-H12-303R	G 1/2"	44,0	54,1	27
CRHL12-H12-316R	G 1/2"	44,0	54,1	27

ACRHL12-M-C

Male connection BSPP thread with O-ring

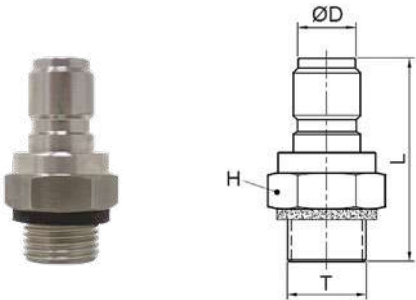


CODE	T	ØD	L	H
ACRHL12-M12G-303C	G 1/2"	15,3	54,0	27
ACRHL12-M12G-316C	G 1/2"	15,3	54,0	27

ACRHL12-M-C
Supplied with NBR seal

ACRHL12-H

Female connection BSPP thread

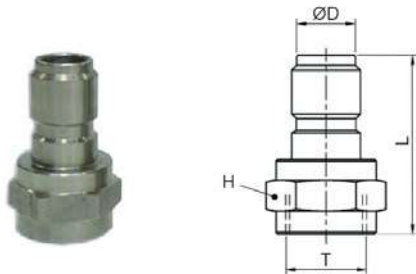

CODE	T	ØD	L	H
ACRHL12-H14	G 1/4"	15,3	37,5	20
ACRHL12-H14-303	G 1/4"	15,3	37,5	22
ACRHL12-H38	G 3/8"	15,3	37,5	22
ACRHL12-H38-303	G 3/8"	15,3	37,5	22
ACRHL12-H38-316	G 3/8"	15,3	37,5	22
ACRHL12-H12	G 1/2"	15,3	44,5	27
ACRHL12-H12-303	G 1/2"	15,3	44,5	27
ACRHL12-H12-316	G 1/2"	15,3	44,5	27

