

GRUPPE 3 Section	GE- WICHT <i>Weight Approx.</i>	VERWENDUNG FÜR <i>Suitable for</i>	ABMESSUNGEN ≈ mm <i>Dimensions ≈ mm</i>			BESTELL- NUMMER <i>Part Number</i>
	≈ kg		D	d	s	Type
	0,001		20	7	2	VD 20/7
	0,001	ZVG 1	20	9,5	2	VD 20/9,5
	0,001	(G 1½")	20	13	2	VD 20/13
	0,001	ZVF 25, ZV 25	21	6	3	VD 21/6
	0,001	M 10 - W 21,8 x 1¼"	22	12	2	VD 22/12
	0,001	G 5⁄8"	23	16	2	VD 23/16
	0,001	(ZVF 40), ZVF 50, ZV 400, ZV 500	24	11	2	VD 24/11
	0,001		25	7	3	VD 25/7
	0,001	G ¾"	26	19	2	VD 26/19
	0,001		27	13	1,5	VD 27/13
	0,001	ZVA 32	30	20	3	VD 30/20
	0,001	M 30 x 1,5 L	30	21	2	VD 30/21
	0,001	G 1"	33	24	2	VD 33/24
	0,001	ZVA - Mix - Anschluss	36	28	2	VD 36/28
	0,004		39	20	4	VD 39/20
	0,002	G 1¼" (DN 25)	42	29	2	VD 42/29
	0,001	G 1¼" (DN 25 + DN 32)	42	34	2	VD 42/34
	0,004	(ZVF 40), ZVF 50, ZV 400, ZV 500	47	34	4	VD 47/34
	0,002	G 1½" (DN 32)	48	34	2	VD 48/34
	0,002	ZH 50	48	37	2	VD 48/37
	0,002	G 1½" (DN 32 + DN 38)	48	39	2	VD 48/39
	0,003		52	39	2	VD 52/39
	0,003	G 1¾"	54	44	2,5	VD 54/44
	0,003	ZH 35, ZH 50	56	46	2,5	VD 56/46
	0,004		60	45	2,5	VD 60/45 x 2,5
	0,006		60	45	4	VD 60/45
	0,003	G 2"	60	49	2	VD 60/49
	0,003		67	53	2	VD 67/53
	0,003		69	60	3	VD 69/60
	0,005		72	58	3	VD 72/58
	0,005	G 2½"	76	63	2,5	VD 76/63
	0,008		80	60	3	VD 80/60
	0,007	M 80 x 3, W 82 x 1⁄6 (Marine)	82	65	3	VD 82/65
	0,006	G 3"	88	77	3	VD 88/77
	0,010	G 3½"	100	80	3	VD 100/80
	0,018	4½" DIN 3799	113	80	3	VD 113/80
	0,009	G 4"	114	100	3	VD 114/100
	0,012	G 5"	140	124	3	VD 140/124
	0,026	5½" DIN 3799	140	102	3	VD 140/102






Flachdichtungen Type **VD** aus Polyurethan-Elastomer, hoch-abriebfest, Shore-Härte ≈ 90°. Für Mineralölprodukte aller Art und viele Lösungsmittel gemäß Beständigkeitsübersicht auf Seite 396.

Standardgrößen (senkrechte Balken) aus Polyurethan-Spritzguss blau. Übrige Abmessungen aus gegossenem Polyurethan, honigfarben.

Flat seals type **VD** of polyurethane, highly resistant to abrasion. Shore hardness ≈ 90°. For all petroleum based products and many solvents as per resistance chart on page 396.

Standard sizes (vertical strokes) of polyurethane elastomer, injection molded in blue. Other sizes of cast polyurethane, amber coloured.

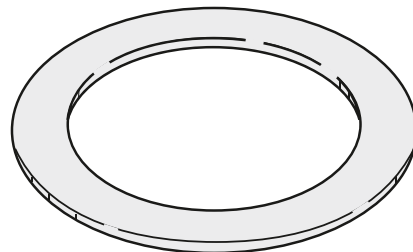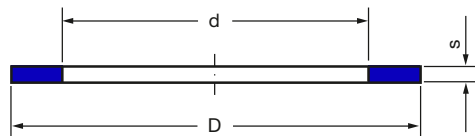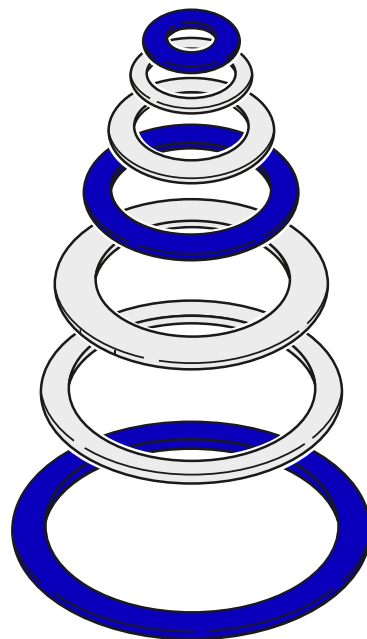

Flachdichtungen aus anderen Werkstoffen siehe Seite 387

Flat seals of other materials see page 387

VD-Flachdichtungen

VD Flat Seals