

# CEMO DT MOBIL PRO hybrid 440 L

## CEMO DT MOBIL PRO hybrid 440/50 L PG 4

ACCORDING TO ADR 1.1.3.1 C)

### DT-Mobil PRO hybrid and PRO hybrid COMBI

- outer bund made from 3 mm painted steel sheet, with lifting lugs, stackable, lockable
- with inner tank for diesel made from polyethylene
- with electronic overfill sensor

#### Basic version:

- powerful pump 12 V or 24 V, self-priming, 40 L/min
- 4 m dispensing hose DN 19
- automatic nozzle


#### Premium version:

- powerful 12 V or 24 V pumps, self-priming, 40 L/min
- hose reel with 8 m hose DN 19
- K24 digital flow meter
- automatic nozzle

#### COMBI version


##### with additional tank for AdBlue®:

- with submersible pump CENTRI SP 30, 12 V, 4 m dispensing hose DN 19 and automatic nozzle

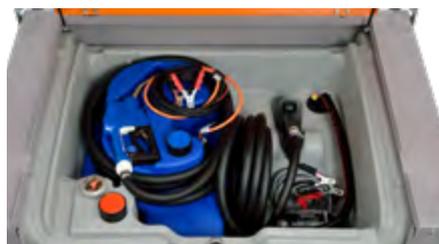


440/50 L COMBI Basic with pump 12 V


440/50 L COMBI Basic with pump 12 V

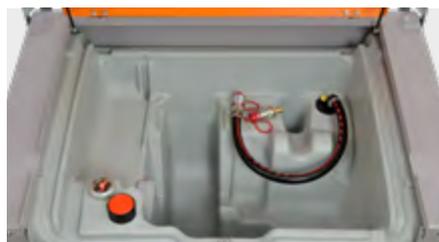

440 L without pump, with quick coupling

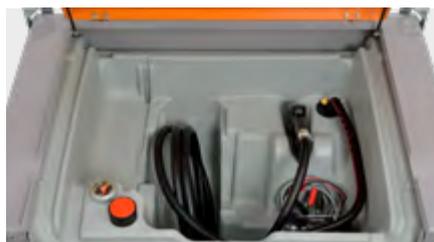

440 L Basic with 12 V pump

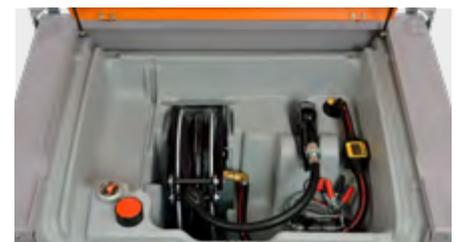

440 L Premium with 12 V pump

### DT-MOBIL PRO PE 440 L AND PRO PE COMBI 440/50 L

Description	Capacity L	External dimensions cm (l x w x h)	Weight approx. kg	Order no.
PRO hybrid 440 L without pump, with quick coupling	440	125 x 87 x 107	196	11113
PRO hybrid 440 L Basic with 12 V pump	440	125 x 87 x 107	202	11115
PRO hybrid 440 L Basic with 24 V pump	440	125 x 87 x 107	203	11116
PRO hybrid 440 L Premium with 12 V pump	440	125 x 87 x 107	215	11117
PRO hybrid 440 L Premium with 24 V pump	440	125 x 87 x 107	216	11118
PRO hybrid COMBI 440/50 L Basic with 12 V pump	440/50	125 x 87 x 107	208	11119
PRO hybrid COMBI 440/50 L Basic with 24 V pump	440/50	125 x 87 x 107	209	11120

### ACCESSORY

Description	Order no.
K24 digital flow meter for diesel	11111