



Clamp Body with Elastomer Insert Type RI

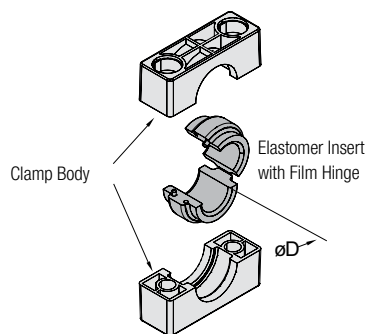

Ordering Codes

Clamp Assembly *4*006-*PP-R

One assembly is consisting of one clamp body and one insert.

- * 1st part of STAUFF Group **4**
- * Exact outside diameter Ø D (mm) **006**
- * Material code (see below) **PP-R**

Clamp Body *4S-*PP-R

One clamp body is consisting of two clamp halves.

- * STAUFF Group **4S**
- * Material code (see below) **PP-R**

Elastomer Insert *RI-*06-*4/4S-*SA73

- * Elastomer Insert **RI**
- * Exact outside diameter Ø D (mm) **06**
- * STAUFF Group 4S (Heavy) and 4 (Standard) **4/4S**
- 5S (Heavy) and 6 (Standard) **6/5S**
- 6S (Heavy) **6S**
- 7S (Heavy) **7S**
- 8S (Heavy) **8S**
- 9S (Heavy) **9S**
- 10S (Heavy) **10S**
- * Material code (see below) **SA73**

Standard Materials



Polypropylene
Colour: Black
Material code: **PP-R**



Polyamide
Colour: Black
Material code: **PA-R**



Elastomer Insert
4S to 6S: **Thermoplastic Elastomer** (73 Shore-A)
Material code: **SA73**
8S to 10S: **EPDM** (70 Shore-A)
Material code: **E70**
Colour: Black

See pages 178 / 179 for material properties and technical information.

Special Materials

Please contact STAUFF for further details on fire-proof clamp body materials, tested and approved according to several international fire-protection standards (such as BS 6853, EN 45545-2, UL 94 and many more).

See pages 180 / 181 for material properties and technical information.

Group	STAUFF	DIN	Outside Diameter Pipe / Tube / Hose Ø D		Ordering Codes Clamp Assembly (Clamp Body + Insert)	* = Material Clamp Body (2 Clamp Halves)	Insert *	Dimensions (mm / in)				
			(mm)	(in)				Ø D1	L1	L2	H	Width
4S	2	6	6		4006-*R	4S-*R	RI-06-4/4S-*	25.98	70	45	46.5	30.5
			8	5/16	4008-*R		RI-08-4/4S-*					
			10		4010-*R		RI-10-4/4S-*					
			12		4012-*R		RI-12-4/4S-*					
			12,7	1/2	4012.7-*R		RI-12.7-4/4S-*					
			14		4014-*R		RI-14-4/4S-*					
			15		4015-*R		RI-15-4/4S-*					
			16	5/8	4016-*R		RI-16-4/4S-*					
			17,2		4017.2-*R		RI-17.2-4/4S-*					
			18		4018-*R		RI-18-4/4S-*					
5S	3	6	19	3/4	4019-*R	5S-*R	RI-19-4/4S-*	38	85	60	58	30.5
			20		5020-*R		RI-20-6/5S-*					
			21,3		5021.3-*R		RI-21.3-6/5S-*					
			22	7/8	5022-*R		RI-22-6/5S-*					
			25		5025-*R		RI-25-6/5S-*					
			26,9		5026.9-*R		RI-26.9-6/5S-*					
			28		5028-*R		RI-28-6/5S-*					
			30		5030-*R		RI-30-6/5S-*					
			32	1-1/4	5032-*R		RI-32-6/5S-*					
			32	1-1/4	6032-*R	6S-*R	RI-32-6S-*	64	115	90	87	45
6S	4	6	33,7		6033.7-*R		RI-33.7-6S-*					
			35		6035-*R		RI-35-6S-*					
			38,7		6038.7-*R		RI-38.7-6S-*					
			40		6040-*R		RI-40-6S-*					
			42		6042-*R		RI-42-6S-*					
			45,5		6045.5-*R		RI-45.5-6S-*					
			48		6048-*R		RI-48-6S-*					
			51	2	6051-*R		RI-51-6S-*					
			53,4		6053.4-*R		RI-53.4-6S-*					
			56,4		6056.4-*R		RI-56.4-6S-*					
7S	5	6	55		7055-*R	7S-*R	RI-55-7S-*	88	154	122	120	60
			57	2-1/4	7057-*R		RI-57-7S-*					
			60		7060-*R		RI-60-7S-*					
			63,5	2-1/2	7063.5-*R		RI-63.5-7S-*					
			65		7065-*R		RI-65-7S-*					
			70	2-3/4	7070-*R		RI-70-7S-*					
			72		7072-*R		RI-72-7S-*					
			76	3	7076-*R		RI-76-7S-*					
8S	6	6	80		8080-*R	8S-*R	RI-80-8S-*	114	208	168	168	80
			88,9	3-1/2	8088.9-*R		RI-88.9-8S-*					
			102		8102-*R		RI-102-8S-*					
9S	7	7	114		9114-*R	9S-*R	RI-114-9S-*	150	251	205	200	91
			133	5-1/4	9133-*R		RI-133-9S-*					
			140		9140-*R		RI-140-9S-*					
10S	8	8	150		10150-*R	10S-*R	RI-150-10S-*	200	336	265	270	120
			165		10165-*R		RI-165-10S-*					
			168		10168-*R		RI-168-10S-*					
			172		10172-*R		RI-172-10S-*					

* Elastomer Inserts for Heavy Series clamp bodies, STAUFF Group 4S also fit into Standard Series clamp bodies, STAUFF Group 4.
Elastomer Inserts for Heavy Series clamp bodies, STAUFF Group 5S also fit into Standard Series clamp bodies, STAUFF Group 6.

Additional outside diameters are available upon request. Please contact STAUFF for further information.

Product Features

- Proven, tested and trusted product in various markets
- Either for the extra vibration/noise reducing installation of pipes and tubes or the extra gentle installation of hoses and cables
- Available for all commonly used outside diameters
- Excellent weathering resistance, even under extreme conditions