


PRESSUREWASH PWSP


Male PressureWash standpipe with 'O' ring.

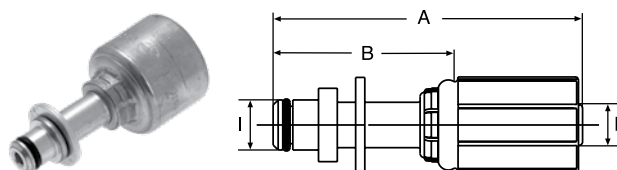

D			A	B	I	REF.
-size	DN	"	mm	mm	mm	G
-4	6	1/4	60.5	34.5	9.9	4G10PWSP
-4	6	1/4	64.5	38.6	10.9	4G11PWSP
-5	8	5/16	64.5	36.5	9.9	5G10PWSP
-5	8	5/16	67.5	39.5	10.9	5G11PWSP
-6	10	3/8	64.5	36.6	9.9	6G10PWSP
-6	10	3/8	67.5	39.6	10.9	6G11PWSP

QUICK-LOK HIGH MQLH

Male Quick-Lok™ High.

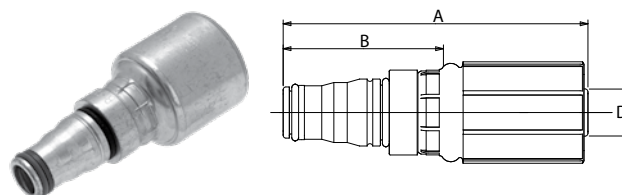

			QLH			
D				A	B	REF.
-size	DN	"		mm	mm	G
-4	6	1/4	4MQLH	67.0	41.0	4G4MQLH
-6	10	3/8	6MQLH	69.0	41.1	6G6MQLH
-8	12	1/2	8MQLH	79.0	41.5	8G8MQLH
-10	16	5/8	10MQLH	79.0	41.5	10G10MQLH
-12	20	3/4	12MQLH	93.0	42.0	12G12MQLH
-16	25	1	16MQLH	101.0	44.2	16G16MQLH

-4 to -8 size are 35.0 MPa (5000 psi); -10 & -12 size are 28.0 MPa (4000 psi); -16 size is 21.0 MPa (3000 psi). / Note: not to be used as a live swivel.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.