


SAE FLHCFM45

SAE 'O' ring flange with pre-installed monobloc.
Code 62. 45° swept elbow.

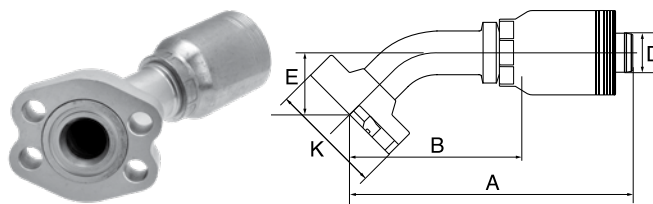


D			A	B	E	K	REF.	
-size	DN	"	mm	mm	mm	mm	GSM	
-24	40	1.1/2	232.0	137.0	44.0	63.5	24GSM24FLHCFM45M	
-32	50	2	297.0	182.5	63.0	79.5	32GSM32FLHCFM45-063	

M: Medium drop per ISO 12151-3.

SAE FLHCFM90

SAE 'O' ring flange with pre-installed monobloc.
Code 62. 90° swept elbow.

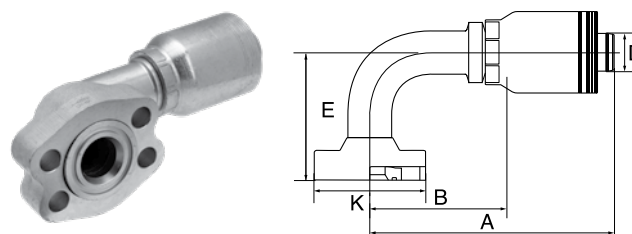


D			A	B	E	K	REF.	
-size	DN	"	mm	mm	mm	mm	GSM	
-24	40	1.1/2	214.0	119.0	94.0	63.5	24GSM24FLHCFM90-094	
-32	50	2	264.0	150.0	120.0	79.5	32GSM32FLHCFM90S	

S: Short drop per ISO 12151-3.

SAE FLH

SAE 'O' ring flange high-pressure.
Code 62.

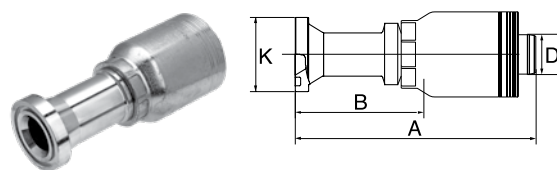

D			A	B	K	KIT	REF.	
-size	DN	"	mm	mm	mm		GSM	
-24	40	1.1/2	200.0	105.0	63.5	24 PH-FLH	24GSM24FLH	
-24	40	1.1/2	200.0	105.0	79.5	32 PH-FLH	24GSM32FLH	
-32	50	2	230.0	116.0	63.5	24 PH-FLH	32GSM24FLH	
-32	50	2	251.4	137.4	79.5	32 PH-FLH	32GSM32FLH	

Details on flange kits see page 250.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.