



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

GARDA

FEATURES

- SELF-PRIMING
- CONTINUOUS DUTY (AC VERSION)
- THERMAL PROTECTION
- IP65

The PIUSI GARDA pump, suitable for the transfer of water, diesel and oil, consists of a gear pump that ensures greater power during transfer, in the event that the liquid being delivered has a low to medium viscosity. The PIUSI GARDA electric pump is a self-priming device, available both AC and DC versions, with a high degree of suction and is particularly suitable for the transfer of non-corrosive lubricating oils or viscous liquids.

PERFORMANCE

UP TO

10 L/MIN

FLOW RATE

AC/DC

VOLTAGE

POWER



GARDA AC



GARDA DC

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
NMT450002A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT450003A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT450008	5,8	12,7	360X190X290	14,1X7,4X11,4	-	1



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

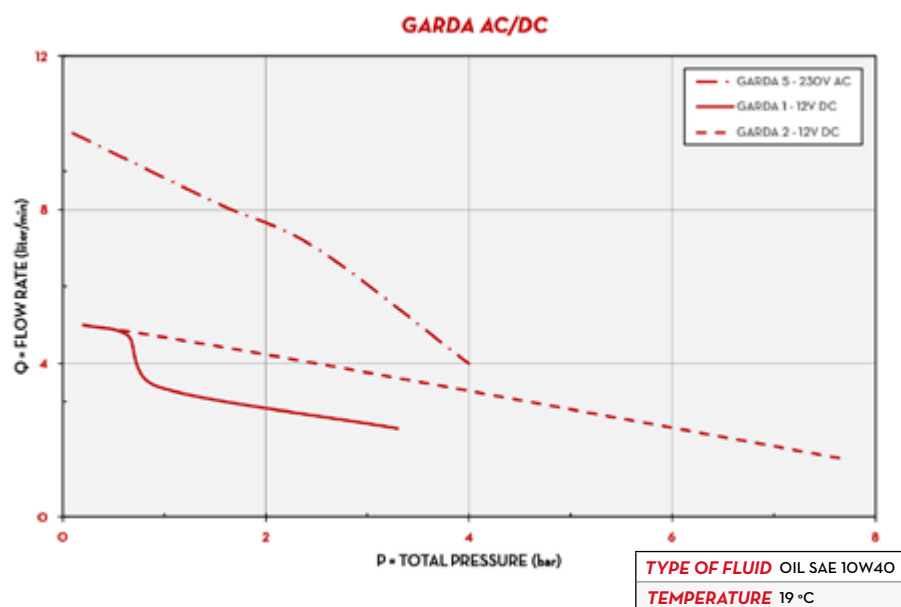

DIMENSIONS

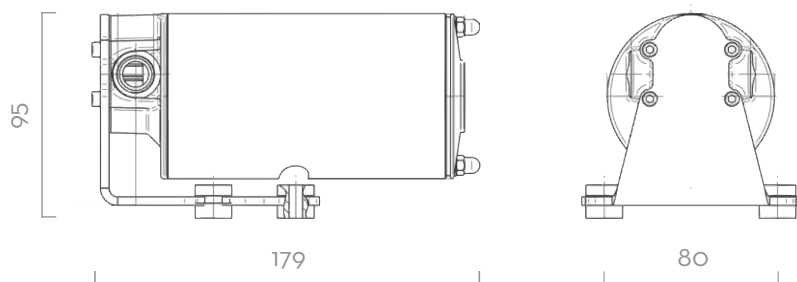

Dimensions expressed in millimeters

IN THE BOX

- GARDA PUMP
- INSTRUCTION MANUAL

DETAILS



MATERIALS

- BODY: CAST IRON
- SHAFT: STEEL
- GEARS: BRONZE

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		VOLTS/HZ	MAX AMPERE	FUSE	PORTS
			L/MIN	GPM	BAR	PSI				BSP
NMT450002A	GARDA 2 12V	O D W	10	2,6	3,5	50	12	19 A	-	3/8"
NMT450003A	GARDA 2 24V	O D W	10	2,6	3,5	50	24	10 A	-	3/8"
NMT450008	GARDA5 230V/50HZ	O D W	10	2,6	3,5	50	230V/50HZ	1,8 A	-	3/8"

ELECTRIC PUMPS