


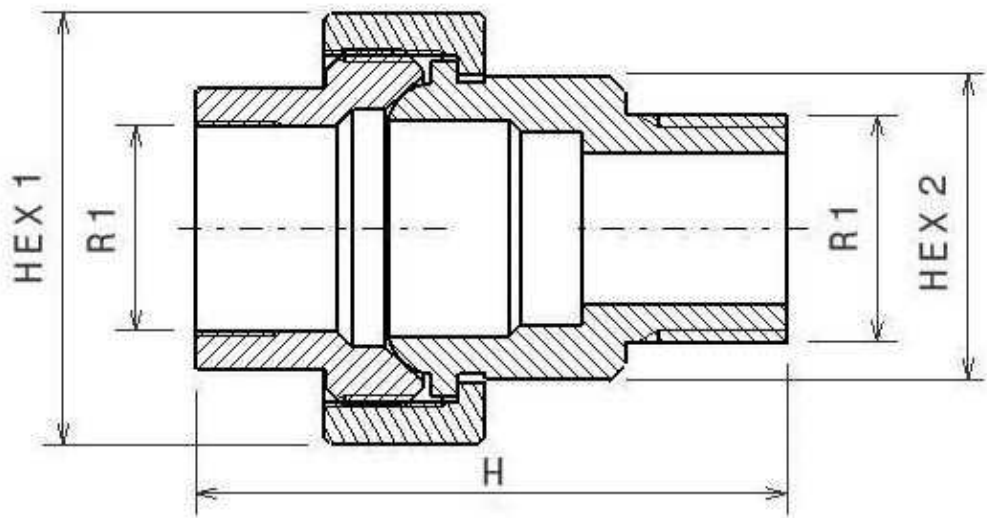

Norms: Male thread according to EN10226-1 BSPT
Female thread according to ISO 228-1 BSP
Face: 1/8"=>1"Octagonal; 1"1/4=>4"Decagonal
PN: 1/8--3/8": 20 Bar; 1/2" - 2": 17,6 Bar; 2 1/2"- 3": 14 Bar ; 4"- 6": 7 Bar

Part nº	R1	HEX 1	HEX 2	H
ZFIG34104	1/4"	30,5	17	42,5
ZFIG34106	3/8"	34	21	44
ZFIG34108	1/2"	37	22	53
ZFIG34112	3/4"	46	30	58
ZFIG34116	1"	52	37	65
ZFIG34120	1"1/4	64,5	46	71,5
ZFIG34124	1"1/2	70	52	75
ZFIG34132	2"	86	64	88
ZFIG34140	2"1/2	105	80	93
ZFIG34148	3"	118,5	93	104
ZFIG34160	4"	147	117	111

The dimensions in micro-casting parts are approximated in those elements without mechanization.