



Bulkhead SSK-15

A



Version A



Version B

Thread	Dimensions (mm/in)		Version	Weight (^{kg} /lbs) ca. per 100	Ordering Codes (Standard Option)
T	h	Hex			
M16 x 1,5	72	19	A	11,20	SSK-15-W3
	2.83	.75		24.64	
M16 x 1,5 ¹	72	22	B	12,30	SSK-15/08S-W3
	2.83	.87		27.06	

Also available for gaseous media: Type SSKK

¹ Compression ring assembly 08S according to ISO 8434-1 / DIN 2353

Standard option: With Hexagon Lock Nut.

Standard option - Version B: Excluding cutting rings and union nuts


Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

SSK-15/08S*-SK*-W3

* Type	Bulkhead with Ball Check	SSK
* Series	STAUFF Test 15 (Connection Thread M16x1,5)	-15
* Outside Tube Diameter	acc. to dimension table	/08
* Series	Heavy Series	S
* Seal Material	FKM (Viton®) EPDM	none -E
* Protection Cap	Knurled protection cap Hexagonal protection cap	- -SK
* Material Code	Steel, zinc/nickel-plated	-W3
	Stainless Steel V2A - 1.4305 (AISI 303)	-W4
	Stainless Steel V4A - 1.4571 (AISI 316 Ti)	-W5

Swivel Run Tee with 37° JIC Connection SGV-JIC Type FM

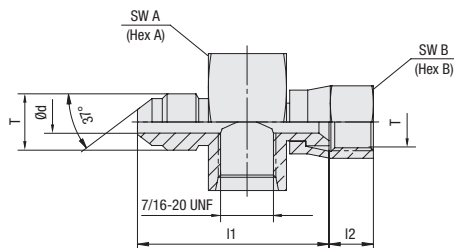

Pipe Ø	JIC- Size	Dimensions (mm/in)						Thread T	Weight (^{kg} /lbs) ca. per 100	Ordering Codes (Standard Option)
inch		Ø d	l1	l2	Hex A	Hex B		inch		
1/4	04	4,37	37,74	8,74	27	14,29		7/16-20 UNF	8,96	SGV-7/16UNF-04-JIC1/4-FM-W66
		.17	1.49	.34	1.06	.56			19.71	
3/8	06	7,54	40,01	9,53	27	17,46		9/16-18 UNF	9,60	SGV-7/16UNF-06-JIC3/8-FM-W66
		.30	1.58	.38	1.06	.69			21.12	
1/2	08	9,93	44,65	10,72	27	22,23		3/4-16 UNF	11,20	SGV-7/16UNF-08-JIC1/2-FM-W66
		.39	1.76	.42	1.06	.88			24.64	
5/8	10	12,29	48,26	12,70	28,58	25,40		7/8-14 UNF	17,10	SGV-7/16UNF-10-JIC5/8-FM-W66
		.48	1.90	.50	1.13	1.00			37.62	
3/4	12	15,47	51,33	14,45	31,75	31,75		1-1/16-12 UN	20,40	SGV-7/16UNF-12-JIC3/4-FM-W66
		.61	2.02	.57	1.25	1.25			44.88	
1	16	21,44	57,30	15,09	38,10	38,10		1-5/16-12 UN	30,80	SGV-7/16UNF-16-JIC1-FM-W66
		.84	2.26	.59	1.50	1.50			67.76	

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

SGV-7/16UNF*-12*-JIC3/4*-FM*-W66

* Type	Swivel Run Tee	SGV
* Port Connection	acc. to dimension table	-7/16UNF
* JIC Size	acc. to dimension table	-12
* Connection	37° JIC Connection	-JIC
* Outside Tube Diameter	acc. to dimension table	3/4
* Connection	Female/Male Thread	-FM
* Material Code	Carbon Steel, zinc-plated and thick-film passivated	-W66