


Check-valve line mounting BSP Trale

Stainless Steel AISI 316-L

1/1

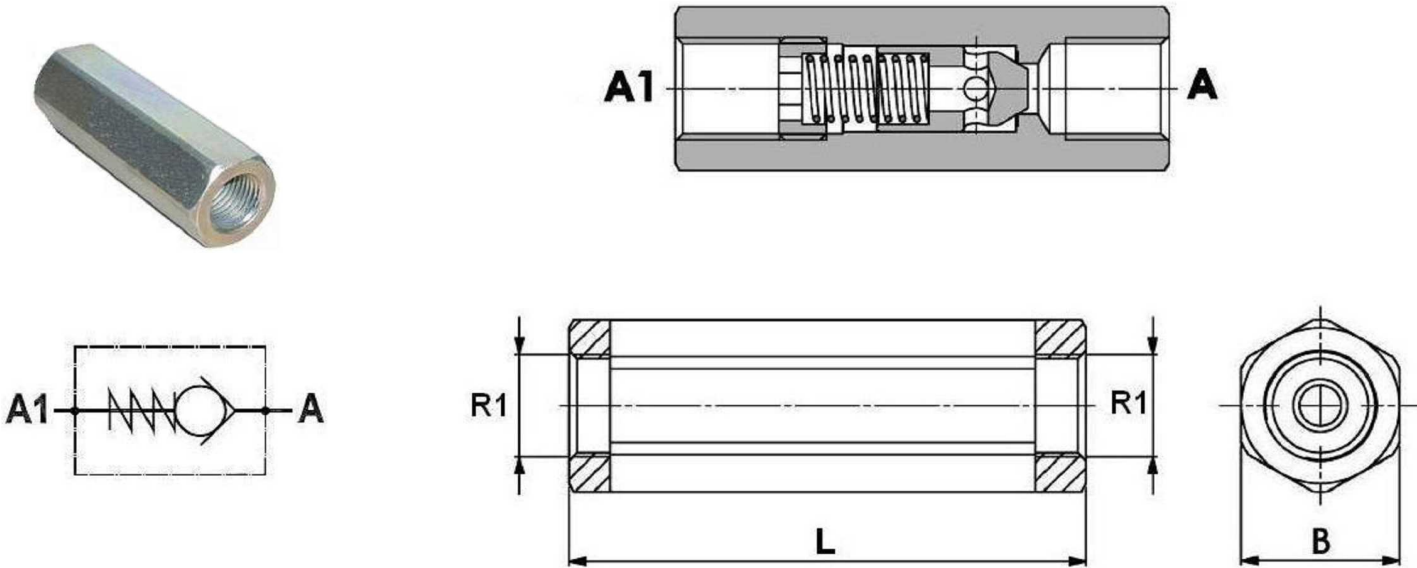

Material: Stainless Steel 316-L
Cracking Pressure: 0.5 bar
Temperature: -20°C to +120°C.

Part n°	R1	Working Pressure (bar)	FLOW MAX (l/min)	Setting (bar)	L	B
ZVT001004	1/4" BSP	350	12	0,5	62	19
ZVT001006	3/8" BSP	350	30	0,5	68	24
ZVT001008	1/2" BSP	320	45	0,5	78	27
ZVT001012	3/4" BSP	300	85	0,5	88	36

A pressure difference of 25 Bar is required for mechanical seal to occur.
=< 3/4" o`riing NBR. >3/4" without o`ring