


Maneuvering valves
Electrical actuating
Solenoid pneumatic valve 5/2 monostable

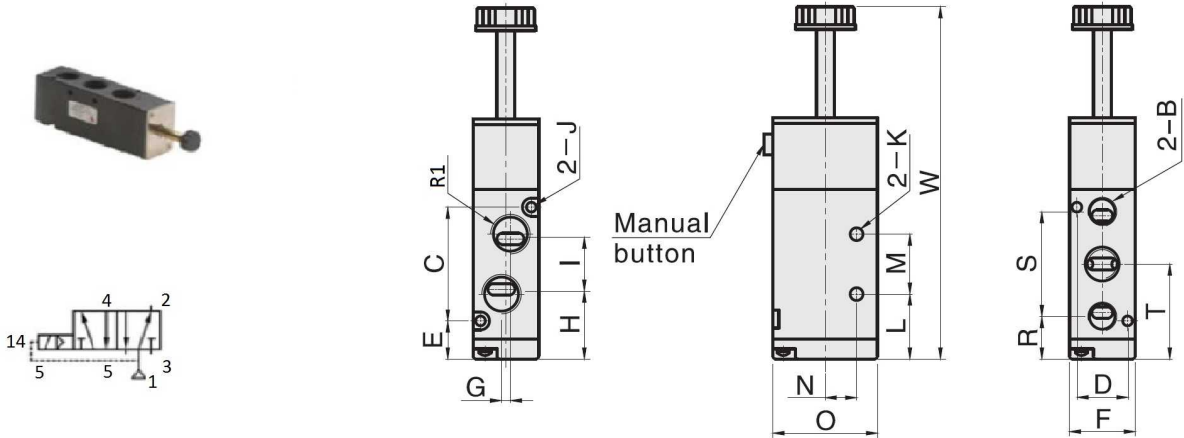

Working pressure(Bar)	1.5 8
Guaranteed pressure(Bar)	12
Working temperature(°C)	-5 80
Max. acting frequency	5 cycles/s
Port size	1/8", 1/4"

Model	Sign	R1	B	C	D	E	F	G	H	I	J	K	L	M	N	O	R	S	T	W
NEU100070		G1/8	G1/8	30	13	13,2	18	3	20,2	16	3,3	3,3	21,2	14	9,5	27	14,5	27,5	28,2	98,5
NEU100073		G1/8	G1/8	38	17	12,7	22	0	22,7	18	3,3	4,3	21,7	20	10,5	35	14,2	36	31,7	117,7
NEU100075		G1/4	G1/8	38	17	12,7	22	3	21,7	20	3,3	4,3	21,7	20	10,5	35	14,2	36	31,7	117,7
NEU100080		G3/8	G1/4	50	20	15	27	4	28	24	4,3	4,3	28	24	13,5	40	17,5	45	40	135,5
NEU100085		G1/2	G1/2	72	27	21	34	4	39	36	4,3	5,5	43	28	17,5	50	25,5	63	57	168

Part n°	R1	Details	Type
NEU100070	1/8" BSP	1/8"	5/2
NEU100073	1/8" BSP	1/4"	5/2
NEU100075	1/4" BSP	1/4"	5/2
NEU100080	3/8" BSP	3/8"	5/2
NEU100085	1/2" BSP	1/2"	5/2