


**DIN 24° FDHORX45**


Female DIN 'O' ring swivel. 24° cone.  
Heavy series. 45° swept elbow.

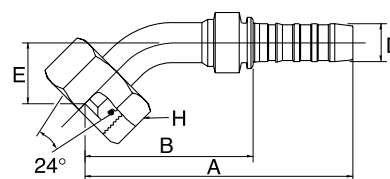

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	208.9	135.2	44.0	60.0	24GSP38FDHORX45

**DIN 24° FDHORX90**


Female DIN 'O' ring swivel. 24° cone.  
Heavy series. 90° swept elbow.

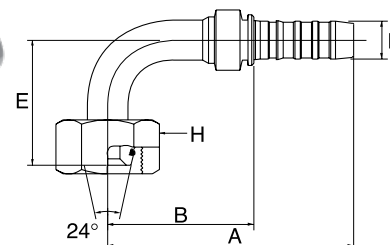

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	194.6	121.0	92.0	60.0	24GSP38FDHORX90

**NPTF MP**

Male NPTF pipe.



D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GSP
-24	40	1.1/2	1.1/2" - 11.5 NPTF	133.0	59.4	50.8	24GSP24MP
-32	50	2	2" - 11.5 NPTF	153.7	61.7	63.5	32GSP32MP

Warning: Use only in NPTF connections. Do not use in oil field (API) connections. Blow apart of an oil field connection can result in serious injuries.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.