



-20°C ÷ +80°C



Working pressure:
16 Bar
Negative pressure:
- 0,95 Bar (- 95 kPa)



Compressed air,
non-aggressive gases and
vacuum

Resistant to mechanical shocks and U.V.
Fire resistance. Non-flammable with no
propagation of flame.

Tube: Aluminum AN AW 6060 T6

Light blue tube: RAL 5012
Green tube: RAL 6018
Grey tube: RAL 7001

Manufactured with seamless
extrusion.
Exterior surface painted with polyester
powder.

PED

SILICONE FREE




Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863

FPAL-4AZ

Aluminum pipe 4 meters light blue



CODE	ØOD	ØID	S	WEIGHT (g/m)
FPAL1614-4AZ	16	14	1	100
FPAL2017-4AZ	20	17	1,5	200
FPAL2522-4AZ	25	22	1,5	275
FPAL4036-4AZ	40	36	2	585

FPAL-6AZ

Aluminum pipe 6 meters light blue




CODE	ØOD	ØID	S	WEIGHT (g/m)
FPAL2017-6AZ	20	17	1,5	200
FPAL2522-6AZ	25	22	1,5	275
FPAL4036-6AZ	40	36	2	585
FPAL6359-6AZ	63	59	2	1000



FPAL-6GR


Aluminum pipe 6 meters grey

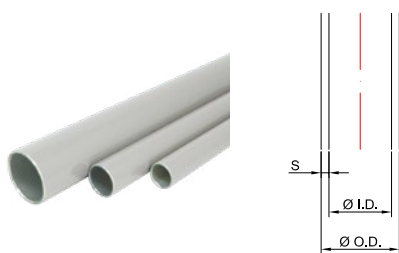

CODE	ØOD	ØID	S	WEIGHT (g/m)
FPAL2017-6GR	20	17	1,5	200
FPAL2522-6GR	25	22	1,5	275
FPAL4036-6GR	40	36	2	585
FPAL6359-6GR	63	59	2	1000

FPAL-6VD


Aluminum pipe 6 meters green

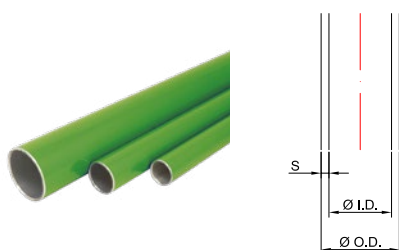

CODE	ØOD	ØID	S	WEIGHT (g/m)
FPAL2017-6VD	20	17	1,5	200
FPAL2522-6VD	25	22	1,5	275
FPAL4036-6VD	40	36	2	585
FPAL6359-6VD	63	59	2	1000

FPIS

Double bend light blue

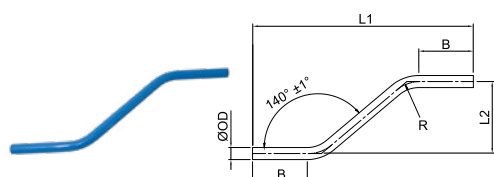

CODE	ØOD	B	R	L1	L2	WEIGHT (g)
FPIS20	20	109	60	440	150	100
FPIS25	25	113	75	460	150	140

