


COUPLINGS FOR WIRE SPIRAL HYDRAULIC HOSES GLOBALSPIRAL MAXIMUM

SAE FLHCFM45

SAE 'O' ring flange with pre-installed monobloc.
Code 62. 45° swept elbow.

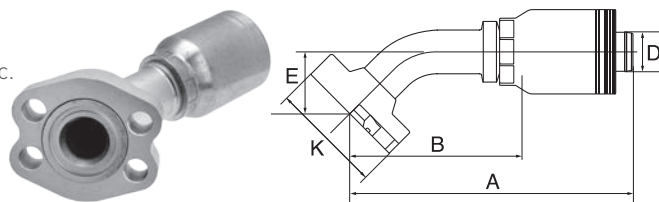


D				A B E K				REF.
-size	DN	"		mm	mm	mm	mm	GSM
-24	40	1.1/2	1.1/2"	232.0	137.0	44.0	63.5	24GSM24FLHCFM45M
-32	50	2	2"	297.0	182.5	63.0	79.5	32GSM32FLHCFM45-063

M: Medium drop per ISO 12151-3.

SAE FLHCFM90

SAE 'O' ring flange with pre-installed monobloc.
Code 62. 90° swept elbow.

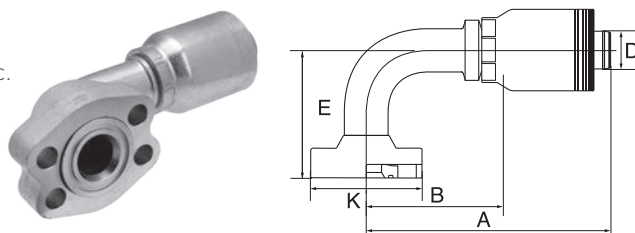


D				A B E K				REF.
-size	DN	"		mm	mm	mm	mm	GSM
-24	40	1.1/2	1.1/2"	214.0	119.0	94.0	63.5	24GSM24FLHCFM90-094
-32	50	2	2"	264.0	150.0	120.0	79.5	32GSM32FLHCFM90S

S: Short drop per ISO 12151-3.

SAE FLH

SAE 'O' ring flange high-pressure. Code 62.

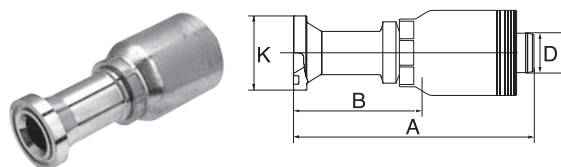

D				A B K			KIT	REF.
-size	DN	"		mm	mm	mm		GSM
-24	40	1.1/2	1.1/2"	200.0	105.0	63.5	24 PH-FLH	24GSM24FLH
-24	40	1.1/2	2"	200.0	105.0	79.5	32 PH-FLH	24GSM32FLH
-32	50	2	1.1/2"	230.0	116.0	63.5	24 PH-FLH	32GSM24FLH
-32	50	2	2"	251.4	137.4	79.5	32 PH-FLH	32GSM32FLH

Details on flange kits see page 292.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.