
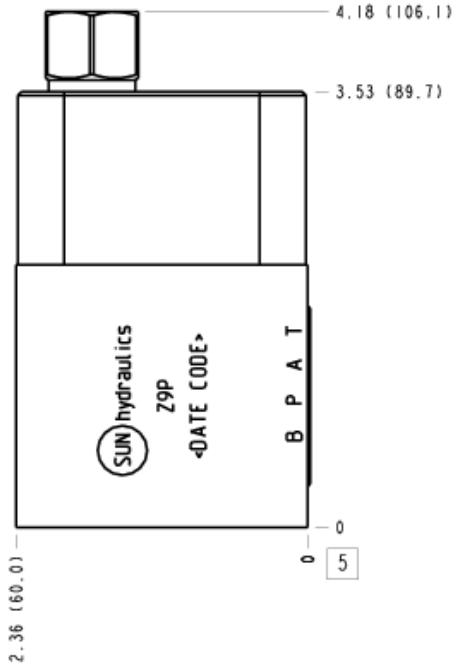


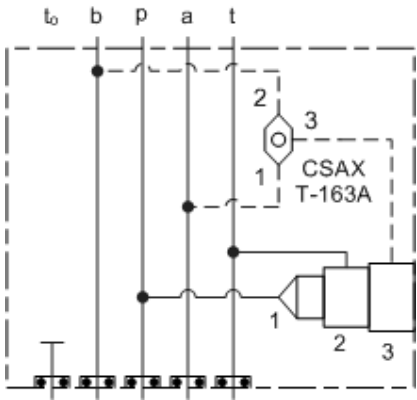

TECHNICAL DATA

Body Type	Sandwich
Interface	Wandfluh NG4 Mini
Body Features	Bypass compensator with shuttle
Stack Height	2.36 in.
Seal Plate Included (see notes)	No
Includes integral cartridge(s)	Yes (see Included Components)
Open Cavities	1
Cavity	T-163A
Model Weight	1.24 lb.

- NOTES
- Seal retainer plate is not required for this model.
 - **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-009	O-Ring	5
CSAXXXN	Cartridge	1

CONFIGURATION OPTIONS

Model Code Example: Z9PArray

MODIFIER


- 6061-T651 Aluminum, Buna-N
- /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
 - /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
 - /15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
 - /16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
 - /V 6061-T651 Aluminum, Viton
 - /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
 - /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
 - /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
 - /S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel
 - /V 65-45-12 Ductile Iron, Viton, Dewatering Oil
 - /V3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
 - /V4 65-45-12 Ductile Iron, Viton, Chem. Black
 - /V5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

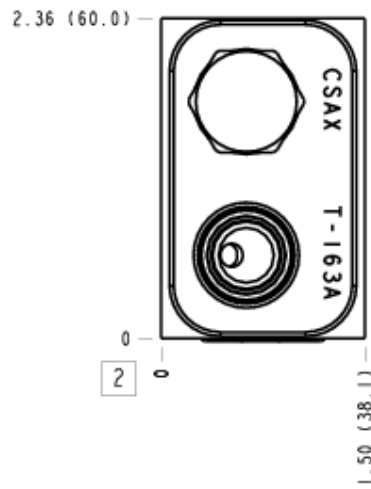


Face 5

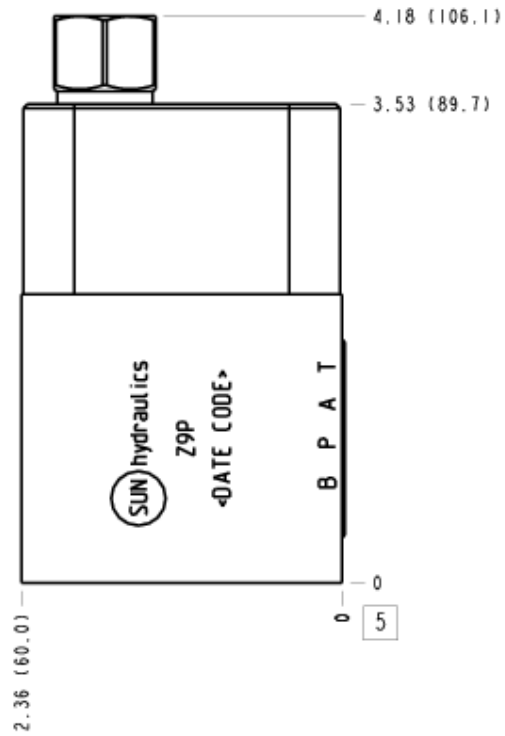

Face 6

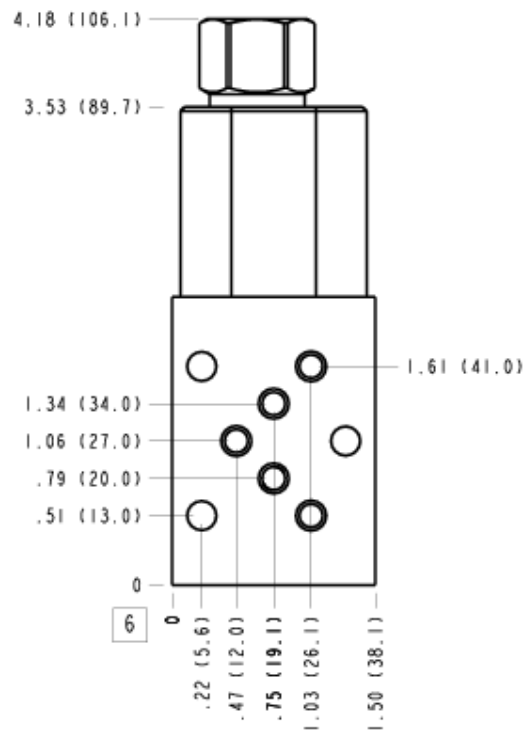

Face 7

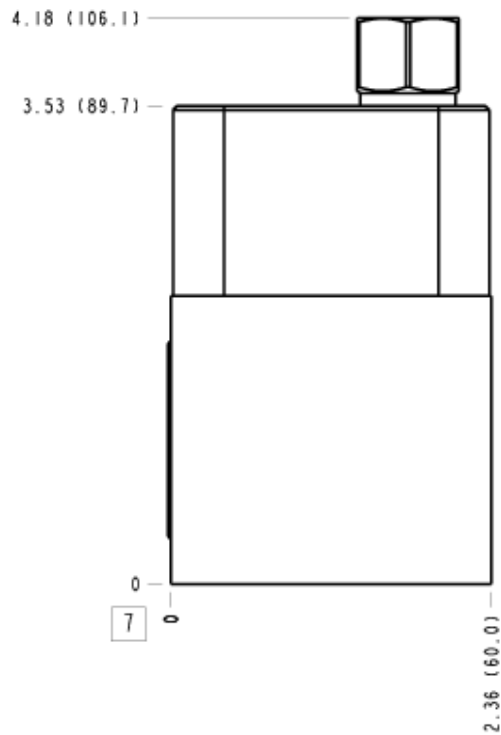

Face 8

