

MANUAL

With the Series 530 manual hose reels, dimensions increase, guaranteeing a greater standard of rewinding length.

PAINTED
STEEL

AISI 304 - 316
STAINLESS
STEEL

Endurance
and capacity



Note: All the hose reels in the table are without hose

Fluid - Pressure	PAINTED STEEL	AISI 304 S. STEEL	AISI 316 S. STEEL	Connection	
	P/N	P/N	P/N	inlet	outlet
Air - Water 20 bar - brass swivel joint - Viton® seals	75300/10	75320/10	-	F1/2"G	F1/2"G
Water max 130° C 100 bar - AISI 304 stainless steel swivel joint - Viton® seals	75300/20	75340/20 *	75350/20 **	F1/2"G	F1/2"G
Water max 130° C 200 bar - AISI 304 stainless steel swivel joint - Viton® seals	75300/30	75340/30	75350/30 **	F3/8"G	F1/2"G
Water max 130° C 400 bar - AISI 304 stainless steel swivel joint - Teflon® seals	75300/35	75340/35	75350/35 **	F3/8"G	F1/2"G
Oil and similar 150 bar - galvanized steel swivel joint - "polyurethane" seals	75300/40	-	-	F1/2"G	F1/2"G
Grease 600 bar - galvanized steel swivel joint - "polyurethane" seals	75300/50	75320/50	-	F 3/8" G	F 1/2" G
Diesel fuel 10 bar - brass swivel joint - Viton® seals	75300/60	75320/60	-	F 1" G	F 1" G

Note: for special fluids see the compatibility table at page 26


* suitable also for oil

** AISI 316 stainless steel swivel joint

Hose reel capacity

ø hose external		Series 530
1/4"	14 mm	Length max 60 m
3/8"	17 mm	Length max 35 m
1/2"	20 mm	Length max 25 m
5/8"	21 mm	Length max 18 m
3/4"	27 mm	Length max 15 m
1"	34 mm	Length max 7 m

Overall dimensions (mm)

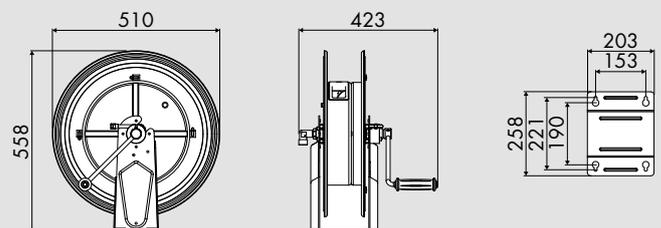

No.1 packing m³ 0,156 kg 15,5