




Counterbalance, On A, Pilot from B




Counterbalance, On B, Pilot from A




Pilot Operated Check, On A Pilot from B




Pilot Operated Check, On B Pilot from A




Reducing, On A drain to B




Reducing, On B drain to A



Reducing/Relieving, On A tank to B



Reducing/Relieving, On B tank to A

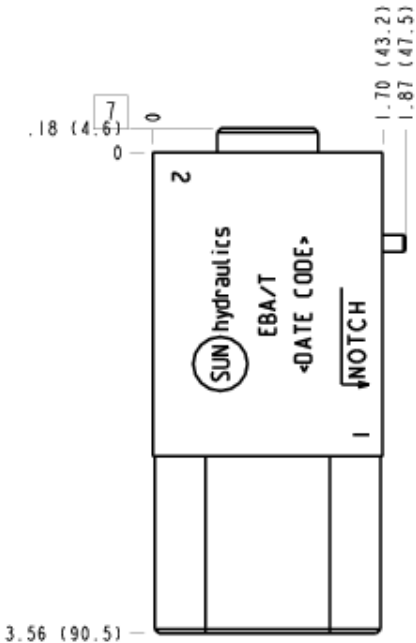

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On A or B, port 3 to opposite side
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-11A
Port Size	1/4" NPTF
Model Weight	2.11 lb.

CONFIGURATION

/T Modifier 65-45-12 Ductile Iron, Metric, Buna-N,
Dewatering Oil

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
EBA, /10, /11, /15, /16, /S, /S3, /V, /Y, /Y3	Gage Port (Plugged): 1/4" NPTF;
EBA/1A, /1B, /1F, /1G, /M, /T, /T3, /W, /W3, /Z	Gage Port (Plugged): 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-018-002	Plug	1
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
850-004-250	Plug	1

CONFIGURATION OPTIONS

Model Code Example: EBA/T


MODIFIER	(/T)
/T	65-45-12 Ductile Iron, Metric, Buna-N, Dewatering Oil
	6061-T651 Aluminum, Buna-N
/11	6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10	6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V	6061-T651 Aluminum, Viton
/16	6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15	6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/M	6061-T651 Aluminum, Metric, Buna-N
/1B	6061-T651 Aluminum, Metric, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1A	6061-T651 Aluminum, Metric, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/Z	6061-T651 Aluminum, Metric, Viton
/1G	6061-T651 Aluminum, Metric, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/1F	6061-T651 Aluminum, Metric, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S	65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S4	65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3	65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y	65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y4	65-45-12 Ductile Iron, Viton, Chem. Black
/Y3	65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
/T4	65-45-12 Ductile Iron, Metric, Buna-N, Chem. Black
/T3	65-45-12 Ductile Iron, Metric, Buna-N, Trivalent Clear Zinc with Top Sealer
/W	65-45-12 Ductile Iron, Metric, Viton, Dewatering Oil
/W4	65-45-12 Ductile Iron, Metric, Viton, Chem. Black
/W3	65-45-12 Ductile Iron, Metric, Viton, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

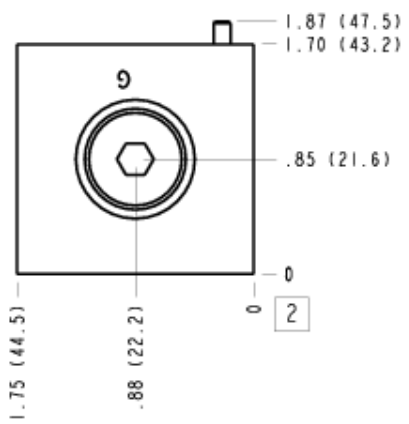


Face 5

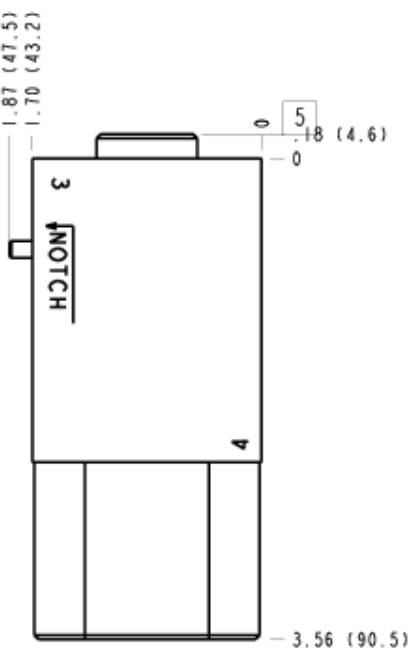


Face 6

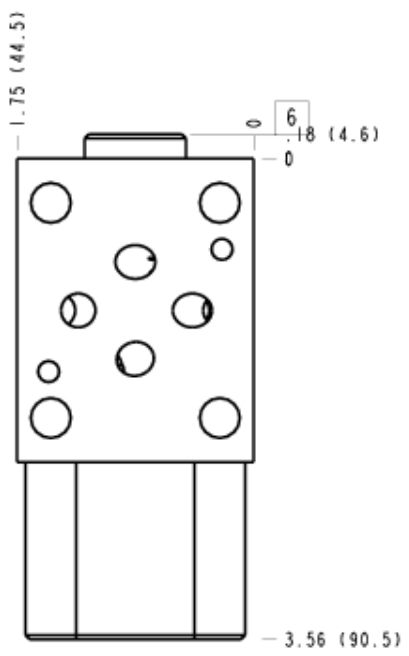

Face 7

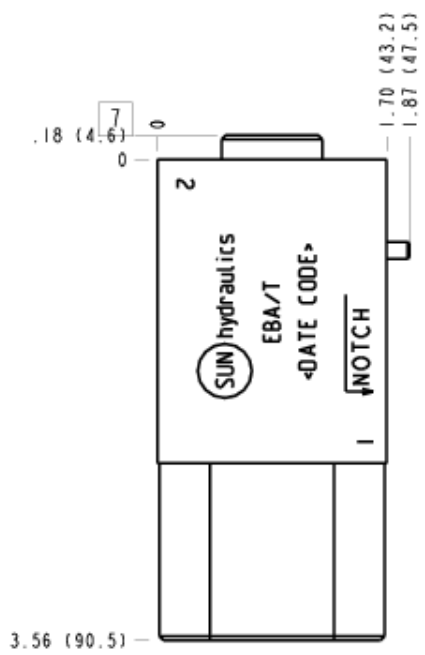

Face 8

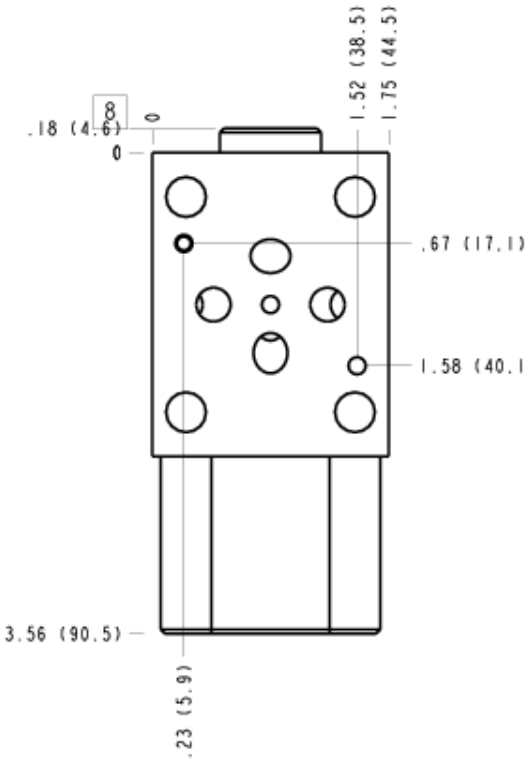

Face 10

