


Bulkhead SSK-20

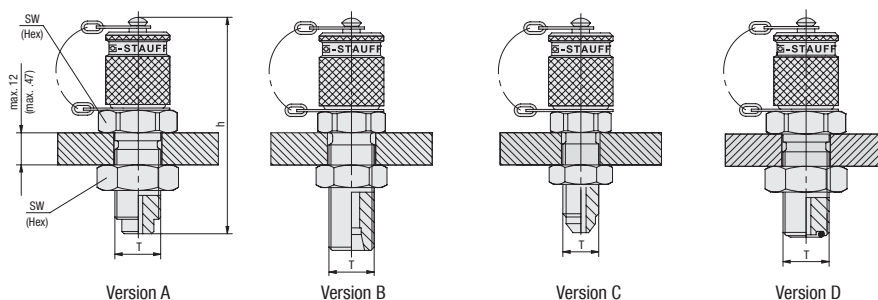

Ordering Codes

SSK-20*-JIC1/4*-M*-SK*-W3

* Type	Bulkhead with Ball Check	SSK
* Series	STAUFF Test 20 (Connection Thread M16x2)	-20
* Connection	37° JIC Connection	-JIC
* Outside Tube Diameter	acc. to dimension table	1/4
* Connection	Male Thread	-M
* Seal Material	NBR (Buna-N®) FKM (Viton®) EPDM Version A/B/C	-B -V -E none
* Protection Cap	Knurled protection cap Hexagonal protection cap Plastic protection cap	- -SK -KK
* Material Code	Steel, zinc/nickel-plated	-W3
	Stainless Steel V2A - 1.4305 (AISI 303)	-W4
	Stainless Steel V4A - 1.4571 (AISI 316 Ti)	-W5

Thread	Dimensions (mm/in)		Version	Weight (kg/lbs) ca. per 100	Ordering Codes (Standard Option)
T	h	Hex			
M16 x 2	72 2.83	19 .75	A	10,80 23.76	SSK-20-W3
M14 x 1,5 ¹	72 2.83	19 .75	B	10,10 22.22	SSK-20/08L-W3
M16 x 1,5 ¹	72 2.83	22 .87	B	12,30 27.06	SSK-20/08S-W3
M18 x 1,5 ¹	72 2.83	24 .94	B	11,90 26.18	SSK-20/12L-W3
7/16-20 UNF ²	66 2.60	17 .67	C	12,30 27.11	SSK-20-JIC1/4-M-W3
9/16-18 UNF ³	67 2.64	22 .87	D	12,00 26.40	SSK-20-04-ORFS-B-W3
11/16-16 UN ³	72 2.83	27 1.06	D	16,10 35.42	SSK-20-06-ORFS-B-W3
13/16-16 UNF ³	75 2.95	30 1.18	D	10,00 22.04	SSK-20-08-ORFS-B-W3

Also available for gaseous media: Type SSKK

¹ Compression ring assembly 08L/ 08S/ 12L according to ISO 8434-1 / DIN 2353

² JIC cone fitting according to SAE J514



³ O-ring face sealing according to SAE J1453

Standard option: With Hexagon Lock Nut.

Standard option - Version B: Excluding cutting rings and union nuts

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Test Adaptor SAD-20



Ordering Codes

SAD-20/15*-W3

* Type	Test Adaptor	SAD
* Connection Type	Version A Version A Version B	-20/15 -20/12 -20/10
* Seal Material	FKM (Viton®) EPDM	none -E
* Material Code	Steel, zinc/nickel-plated	-W3
	Stainless Steel V2A - 1.4305 (AISI 303)	-W4
	Stainless Steel V4A - 1.4571 (AISI 316 Ti)	-W5

Thread	Dimensions (mm/in)		Version	Weight (kg/lbs) ca. per 100	Ordering Codes (Standard Option)
T	h				
M16 x 1,5	39 1.54		A	5,80 12.76	SAD-20/15-W3
S12 ¹	39 1.54		A	5,30 11.66	SAD-20/12-W3
Plug in	37 1.46		B	3,40 7.48	SAD-20/10-W3

¹ Special thread: buttress thread S12,65 x1,5

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Dimensional drawings: All dimensions in mm (in).