

## 0016520 ... 0016720 Safety silencers

- Port size: G3/4 ... G2
- Quick exhaust time
- High safety; due to free passage of air in silencer preventing clogging and therefore minimizing stopping time of the press
- Prevents hazardous airborne contamination from being exhausted at high pressure
- Compact design



### Technical features

**Medium:**  
Compressed air, filtered, lubricated or non-lubricated

**Back pressure:**  
6 bar (87 psi) maximum


**Port size:**  
G3/4 ... G2

**Ambient/Media temperature:**  
-10 ... +60°C (+14 ... 140°F)  
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

**Materials:**  
Body: zinc plated steel  
Mesh: Polyester fibre

### Dimensions

Dimensions in mm  
Projection/First angle

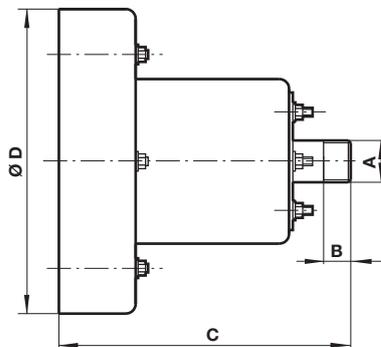

A	B	C	øD	Weight (kg)	Model
G 1	22	186	200	3,0	0016520
G 1 1/2	24	196	200	3,6	0016620
G 2	24	196	200	3,9	0016720

### Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

**»Technical features/data«.**

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.