


3000 PSI Retain Ring Flange with Threaded Holes

SAE J518 Code 61 (ISO 6162-1)

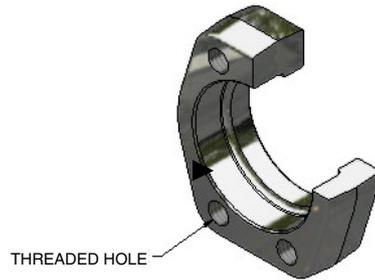

RFAT34 – Retain Ring Flange with UNC Threaded Holes, for Grooved NPS Pipe Only

Size	Pipe Size	Standard Part Number	Working Pressure PSI (Bar)	Weight lbs (kg)
1-1/2"	1-1/2" SCHXXS	RFAT34-150-*	4000 (280)	2.15 (0.98)
2"	2" SCH160/XXS	RFAT34-200-*	4000 (280)	2.65 (1.20)

RFT34 – Retain Ring Flange with UNC Threaded Holes, for Metric Pipe

Size	Pipe Size	Standard Part Number	Working Pressure PSI (Bar)	Weight lbs (kg)
1/2"	26X6.0	RFT34-050-*	5000 (350)	0.44 (0.20)
3/4"	36X8.0	RFT34-075-*	5000 (350)	0.62 (0.28)
1"	39X7.5	RFT34-100-*	5000 (350)	0.75 (0.34)
1-1/4"	46X8.0	RFT34-125-*	4000 (280)	1.15 (0.52)
1-1/2"	56X8.5	RFT34-150-*	4000 (280)	2.15 (0.98)
2"	66X8.5	RFT34-200-*	4000 (280)	2.65 (1.20)
2-1/2"	80X10	RFT34-250-*	3000 (210)	3.75 (1.70)
3"	97X12	RFT34-300-*	3000 (210)	6.10 (2.77)

RFTM34 – Retain Ring Flange with Metric Threaded Holes, for Metric Pipe

Size	Pipe Size	Standard Part Number	Working Pressure PSI (Bar)	Weight lbs (kg)
1/2"	26X6.0	RFTM34-050-*	5000 (350)	0.44 (0.20)
3/4"	36X8.0	RFTM34-075-*	5000 (350)	0.62 (0.28)
1"	39X7.5	RFTM34-100-*	5000 (350)	0.75 (0.34)
1-1/4"	46X8.0	RFTM34-125-*	4000 (280)	1.15 (0.52)
1-1/2"	56X8.5	RFTM34-150-*	4000 (280)	2.15 (0.98)
2"	66X8.5	RFTM34-200-*	4000 (280)	2.65 (1.20)
2-1/2"	80X10	RFTM34-250-*	3000 (210)	3.75 (1.70)
3"	97X12	RFTM34-300-*	3000 (210)	6.10 (2.77)

*** Materials:**

Standard, No Designation = Carbon Steel, Zinc Nickel Plated.

HDG = Carbon Steel, Hot Dip Galvanized.

SS = Stainless Steel, Type 316.

Ordering Example: RFT34-200-SS

* Insert Material _____

3D step models available upon request