


Motorized Series 700 - Accessory on request



P/N 0E77/2F

The clutch mounted on a freewheel bearing enables controlled unwinding of the hose, becoming neutral during rewinding.

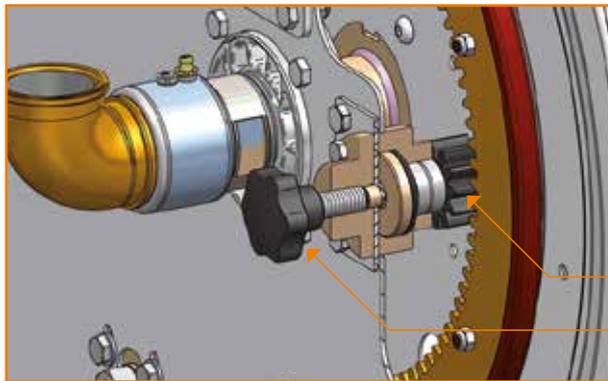

The **clutch** is useful during hose unwinding which is always done manually. It acts on the connection between the crown gears of the hose reel, limiting sliding. Hose unwinding speed is limited by means of the regulating knob, thereby preventing the drum from continuing to turn due to inertia. The clutch is compulsory for Atex approved versions.

Connection between crown gears, on which the clutch acts.

Clutch regulating knob.

