


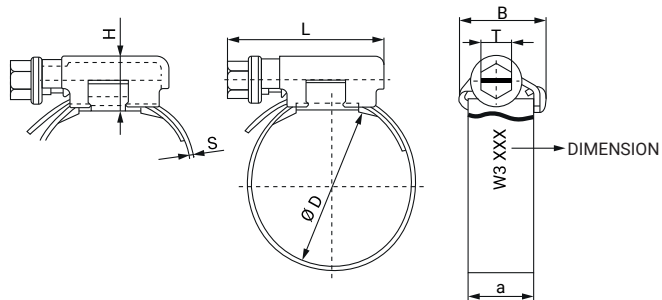

Mikalor High-Torque Clamps were designed to guarantee maximum performance in the most demanding applications. Thanks to the use of an M8 screw and the choice of 16mm bandwidth, torque values can be applied which are far higher than those used with the standard ASFA range, thereby ensuring perfect performance in high-pressure applications.


The High-Torque clamp is particularly popular in industrial and automotive applications due to its outstanding performance. The perfectly rounded bevelled band edges avoid the clamp cutting into or damaging the hose.

MATERIAL: Stainless steel band and housing W3 AISI 430 X6Cr17 (DIN 1.4016)
Stainless steel W4 AISI 304 Cu screw

CORROSION RESISTANCE: 200 hours Salt Spray (ASTM B-117)

*Fully complies with the **AE J1508 Type HD standard and EU Directive 2002/95/EC.**

Part Number	Ø Application mm	a ±0.2	L Max.	S ±0.1	H Max.	B Max.	T	Maximum values		Box Quantity	Outer Box Quantity
								Pressure (Bar)	Par (Nm)		
03066001	25-45	16	40	0,85	14	22	8	55	14	50	50
03066002	32-54	16	40	0,85	14	22	8	50	14	50	50
03066003	45-67	16	40	0,85	14	22	8	45	14	50	50
03066004	57-79	16	40	0,85	14	22	8	40	14	50	50
03066005	70-92	16	40	0,85	14	22	8	30	14	50	50
03066006	83-105	16	40	0,85	14	22	8	20	14	25	25
03066007	95-118	16	40	0,85	14	22	8	17	14	25	25
03066008	108-130	16	40	0,85	14	22	8	14	14	25	25
03066009	121-143	16	40	0,85	14	22	8	11	14	25	25
03066010	133-156	16	40	0,85	14	22	8	8	14	25	25
03066011	146-168	16	40	0,85	14	22	8	6	14	25	25
03066012	159-181	16	40	0,85	14	22	8	5	14	25	25
03066013	172-194	16	40	0,85	14	22	8	4	14	25	25
03066014	184-206	16	40	0,85	14	22	8	3	14	25	25
03066015	197-219	16	40	0,85	14	22	8	2	14	25	25
03066016	210-232	16	40	0,85	14	22	8	2	14	25	25

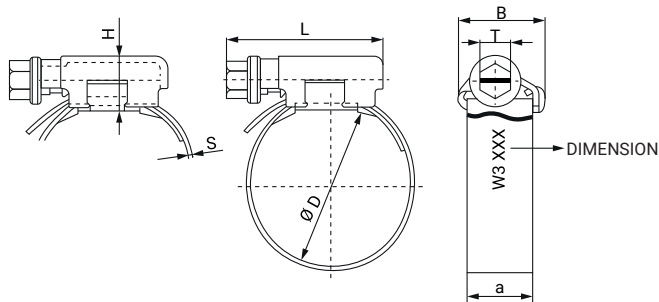

Part Number	Ø Application mm	a ±0.2	L Max.	S ±0.1	H Max.	B Max.	T	Maximum values		Box Quantity	Outer Box Quantity
								Pressure (Bar)	Par (Nm)		
03066017	223-245	16	40	0,85	14	22	8	2	14	25	25
03066018	236-258	16	40	0,85	14	22	8	2	14	25	25
03066019	249-271	16	40	0,85	14	22	8	2	14	25	25
03066020	262-284	16	40	0,85	14	22	8	2	14	25	25
03066021	275-297	16	40	0,85	14	22	8	2	14	25	25
03066022	288-310	16	40	0,85	14	22	8	2	14	25	25