

PUR Hose Kits – with Series 410

CEJN Original, Eurostandard 10.4

- Series 410 couplings and nipples
- Flexible PUR hose with long service life
- Pre-assembled and ready to use



CEJN Hose Kits come pre-assembled and ready for immediate use. They consist of an extremely flexible, straight braided or spiral polyurethane (PUR) hose combined with Series 410 eSafe couplings and nipples with reusable Stream-Line connections.

PUR Hose Kits are also available with Series 300, 310 and 320 Standard or Vented Safety couplings and nipples.



- HOSE 2 M 11X16 MM
- HOSE 4 M 11X16 MM
- HOSE 6 M 11X16 MM
- HOSE 8 M 11X16 MM
- HOSE 10 M 13X18 MM
- HOSE 15 M 13X18 MM

AIR FLOW

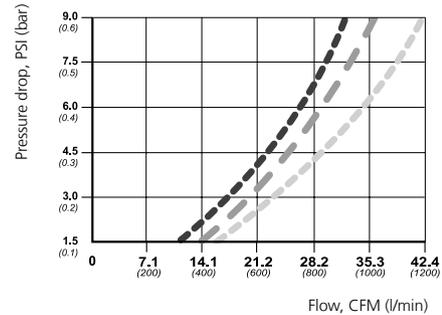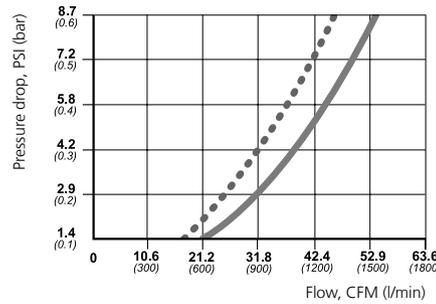

Flow capacity is measured at 87 PSI (6 bar) inlet pressure, and pressure drop at 7 PSI (0.5 bar).

		Service length	Part No.	ID x OD	Max working pressure
SERIES 410, ESAFE	Spiral	6.6 °F (2.0 m)	19 958 9485	(11 x 16 mm)	145 PSI (10 bar)
		13.1 °F (4.0 m)	19 958 9486	(11 x 16 mm)	145 PSI (10 bar)
		19.7 °F (6.0 m)	19 958 9487	(11 x 16 mm)	145 PSI (10 bar)
		26.2 °F (8.0 m)	19 958 9488	(11 x 16 mm)	145 PSI (10 bar)
	Straight Braided	32.8 °F (10.0 m)	19 958 9347	(13 x 18 mm)	145 PSI (10 bar)
		49.2 °F (15.0 m)	19 958 9348	(13 x 18 mm)	145 PSI (10 bar)


Antistatic Hose Kits

- Combined with couplings and nipples
- Flexible EPDM rubber hose that dissipates electro-static
- discharge
- Pre-assembled and ready to use

CEJN Antistatic Hose Kits come pre-assembled and ready for immediate use. They consist of an extremely flexible, straight-braided EPDM rubber hose combined with couplings and nipples. The kits are designed for applications in which media causes excessive static charge or where a static discharge has the potential to cause explosion or damage.



		Service length	Part No.	ID x OD	Max working pressure
SERIES	Series 310	32.8 °F (10.0 m)	19 900 9931	(10 x 17.5)	174 PSI (12 bar)
	Series 320	32.8 °F (10.0 m)	19 900 9923	(10 x 17.5)	174 PSI (12 bar)
	Series 300	32.8 °F (10.0 m)	19 900 9804	(10 x 17.5)	174 PSI (12 bar)

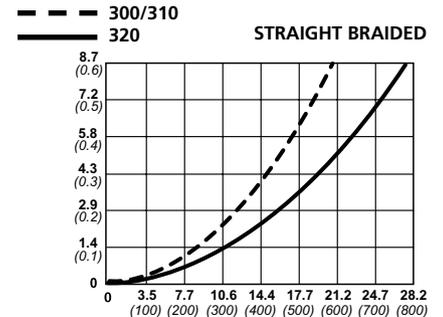

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.us, for general maintenance tips.