
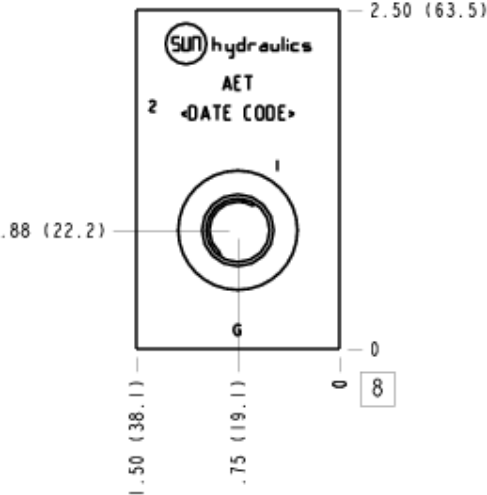




TECHNICAL DATA

|                        |                                |
|------------------------|--------------------------------|
| Body Type              | Line mount                     |
| Interface              | None                           |
| Body Features          | Through port 1 with gauge port |
| Mounting Hole Thread   | M6x1.0 - 6H                    |
| Mounting Hole Depth    | .50 in.                        |
| Mounting Hole Quantity | 2                              |
| Open Cavities          | 1                              |
| Cavity                 | T-162A                         |
| Port Size              | 1/4" BSPP                      |
| Model Weight           | 0.46 lb.                       |

**NOTES** *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers        | Ports                                            |
|------------------|--------------------------------------------------|
| AET, /10,<br>/11 | Ports 1 & 2: 1/4" BSPP; Gage Port:<br>1/4" BSPP; |

CONFIGURATION OPTIONS

Model Code Example: AET


| MODIFIER                                                                                |
|-----------------------------------------------------------------------------------------|
| 6061-T651 Aluminum, Buna-N                                                              |
| /10 6061-T651 Aluminum, Buna-N, Black<br>Anodize - Per MIL SPEC 8625F Type II, Class II |
| /11 6061-T651 Aluminum, Buna-N, Clear<br>Anodize - Per MIL SPEC 8625F Type II, Class I  |
| /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                        |
| /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer                 |
| /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black                                          |
| /S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel                                   |

MANIFOLD FACES


FACE GRID

|   |    |    |    |
|---|----|----|----|
| 1 | 2  | 3  | 4  |
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |


Face 2

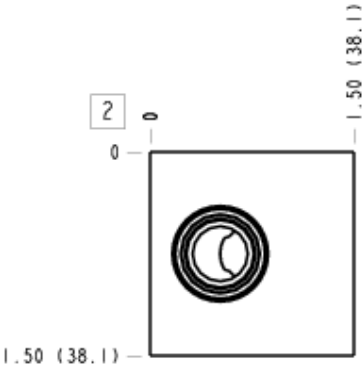


## Face 5

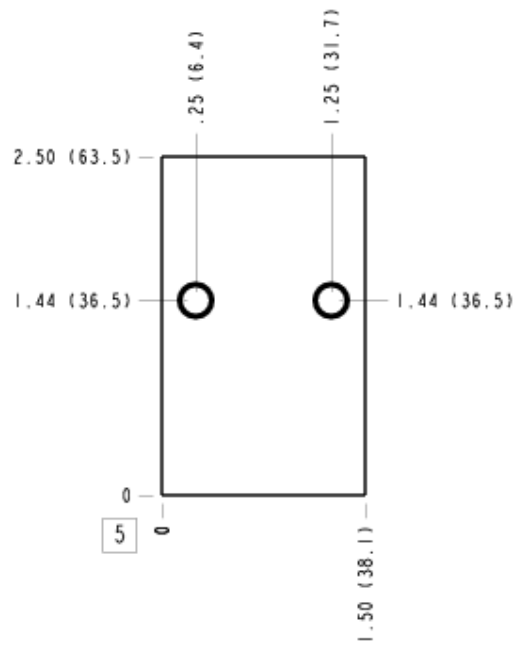


## Face 6

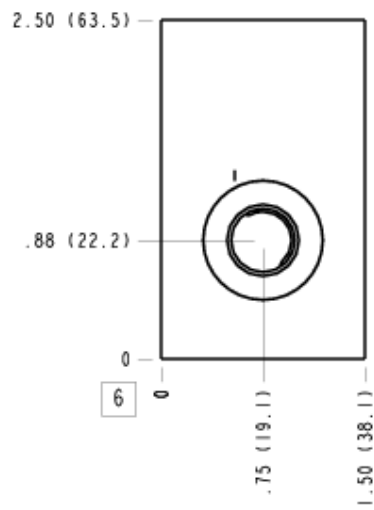

## Face 7

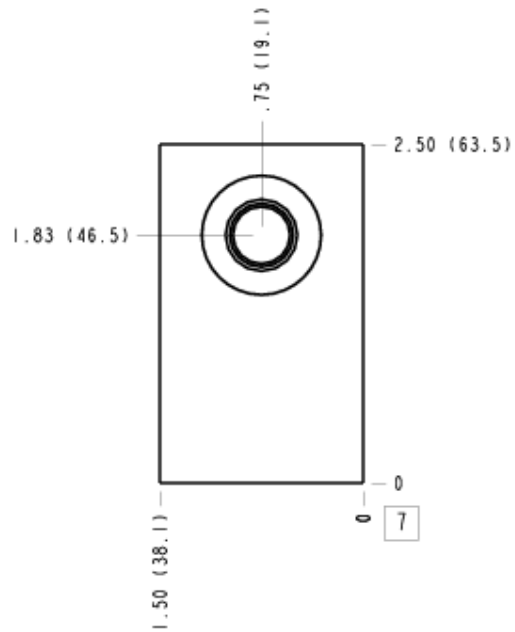

## Face 8

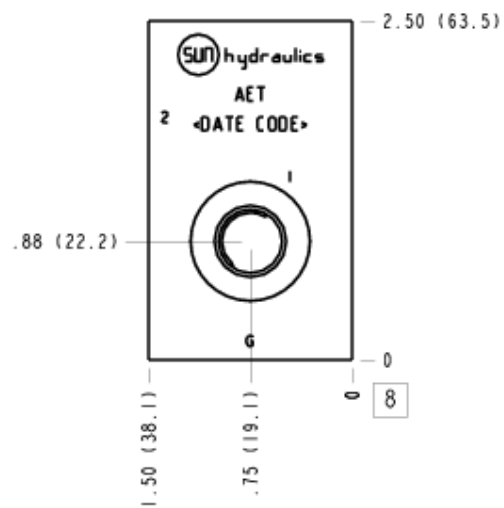

## Face 10

