


COUPLINGS FOR WIRE AND TEXTILE BRAIDED HOSES GLOBALSPIRAL PLUS

BSP FBSPORX90


Female BSP 'O' ring swivel. 60° cone.
90° swept elbow.

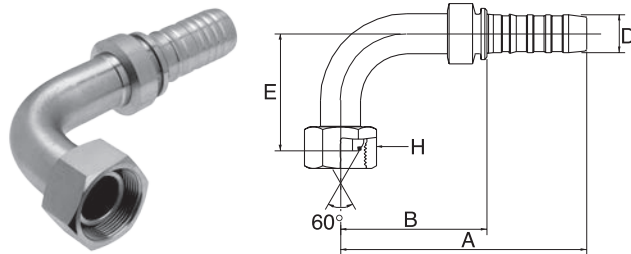

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	G 1.1/2" - 11 BSP	194.6	121.0	100.0	55.0	24GSP24FBSPORX90
-32	50	2	G 2" - 11 BSP	254.7	162.7	129.1	70.0	32GSP32FBSPORX90

BSP MBSP


Male BSP parallel. 60° inverted cone.

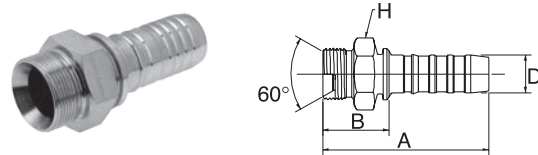

							
D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GSP
-24	40	1.1/2	G 1.1/2" - 11 BSP	130.0	56.4	55.0	24GSP24MBSPP
-32	50	2	G 2" - 11 BSP	148.8	56.8	70.0	32GSP32MBSPP

JIC 37° FJX

Female JIC swivel. 37° inverted cone.

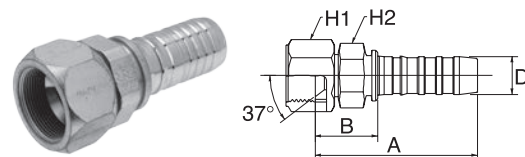

D				A	B	H1	H2	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	1.7/8" - 12 UN	124.0	50.4	60.0	55.0	24GSP24FJX
-32	50	2	2.1/2" - 12 UN	148.0	56.0	75.0	65.0	32GSP32FJX

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.