


DIN EN 14420-7 Camlock Fittings
Camlock Unions AISI 316

Male Camlock coupling, with serrated hose shank
Type E

Stainless Steel AISI 316

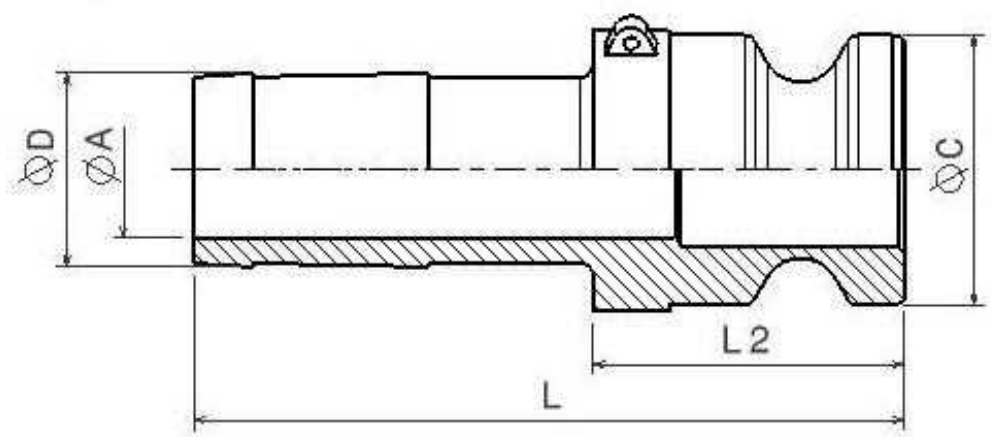

Norms: Male thread according to EN10226-1
Female thread according to ISO 228-1
PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part nº	DN	DN	L	L2	ØA	ØC	ØD
ZE012	1/2"	12	73	32,5	8,5	24	14
ZE015	1/2"	20	73.5	33,5	8,5	32	14
ZE020	3/4"	20	85	35,5	15	32	20
ZE025	1"	25	84	38	21	37	27
ZE032	1"1/4	32	108,8	48,5	26,5	45,6	33
ZE040	1"1/2	40	119,6	67	39,5	53	40
ZE050	2"	50	130,5	52,5	45	63	53
ZE065	2"1/2	65	139,5	59,5	57,5	75,8	66
ZE080	3"	80	155	59	70	91,6	79
ZE100	4"	100	164	65	93,5	119,5	103

The dimensions in micro-casting parts are approximated in those elements without mechanization.