


BSP FBSPORX90BL


Female BSP 'O' ring swivel. 60° cone.
90° block elbow.

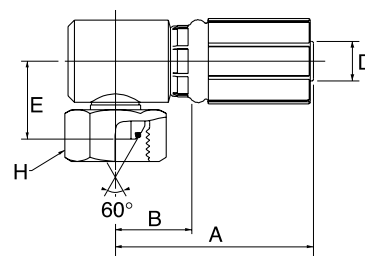

D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	G
-4	6	1/4	G 1/4" - 19 BSP	44.2	18.2	18.0	19.0	4G4FBSPORX90BL
-4	6	1/4	G 3/8" - 19 BSP	46.0	22.0	21.4	22.0	4G6FBSPORX90BL
-6	10	3/8	G 3/8" - 19 BSP	47.9	20.0	21.5	22.0	6G6FBSPORX90BL
-6	10	3/8	G 1/2" - 14 BSP	51.4	23.5	24.0	27.0	6G8FBSPORX90BL
-8	12	1/2	G 1/2" - 14 BSP	61.0	23.5	24.0	27.0	8G8FBSPORX90BL
-8	12	1/2	G 5/8" - 14 BSP	61.0	23.5	25.0	30.0	8G10FBSPORX90BL
-10	16	5/8	G 5/8" - 14 BSP	62.4	24.9	27.6	30.0	10G10FBSPORX90BL
-12	20	3/4	G 3/4" - 14 BSP	78.0	27.0	34.5	32.0	12G12FBSPORX90BL
-16	25	1	G 3/4" - 14 BSP	86.2	29.4	37.8	32.0	16G12FBSPORX90BL
-16	25	1	G 1" - 11 BSP	80.5	34.6	36.1	41.0	16G16FBSPORX90BL

BSP FBSPORX180

Female BSP 'O' ring swivel. 60° cone.
180° swept elbow.

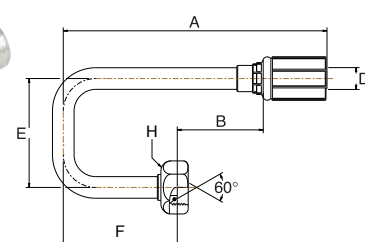

D				A	B	E	F	H	REF.
-size	DN	"		mm	mm	mm	mm	mm	G
-4	6	1/4	G 1/4" - 19 BSP	82.2	56.1	38.0	33.2	19.0	4G4FBSPORX180
-6	10	3/8	G 3/8" - 19 BSP	107.0	79.1	60.0	50.0	22.0	6G6FBSPORX180
-8	12	1/2	G 1/2" - 14 BSP	155.0	117.5	64.0	67.0	27.0	8G8FBSPORX180
-10	16	5/8	G 5/8" - 14 BSP	84.0	46.5	64.0	35.0	30.0	10G10FBSPORX180
-12	20	3/4	G 3/4" - 14 BSP	92.2	41.2	106.0	93.4	32.0	12G12FBSPORX180

-4: MWP 42.0 MPa (6000 psi); -6: MWP 28.0 MPa (4000 psi); -8: MWP 24.5 MPa (3500 psi); -10: MWP 21.0 MPa (3000 psi); -12: MWP 28.0 MPa (4000 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.