


CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N,
Dewatering Oil

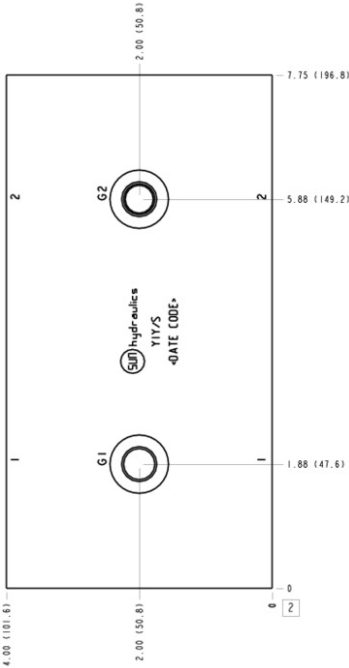

TECHNICAL DATA

Body Type	Line mount
Interface	None
Body Features	Cross port with gauge ports
Mounting Hole Thread	M10x1.5 - 6H
Mounting Hole Depth	.62 in.
Mounting Hole Quantity	2
Open Cavities	2
Cavity	T-16A
Port Size	1 1/4" BSPP
Model Weight	24.50 lb.

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
YIY, /10, /11	Ports 1 & 2: 1 1/4" BSPP; Gage Ports: 1/4" BSPP;

CONFIGURATION OPTIONS

Model Code Example: YIYArray

MODIFIER (VS)


- /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- 6061-T651 Aluminum, Buna-N
- /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

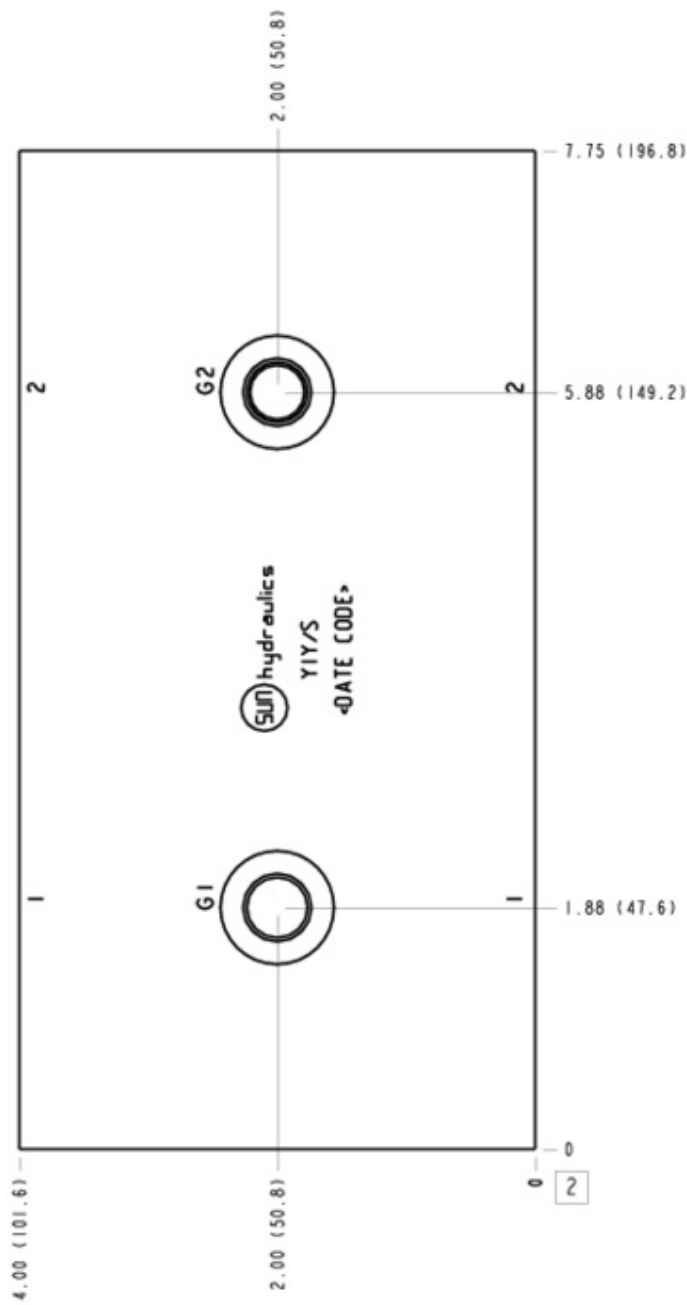


Face 5

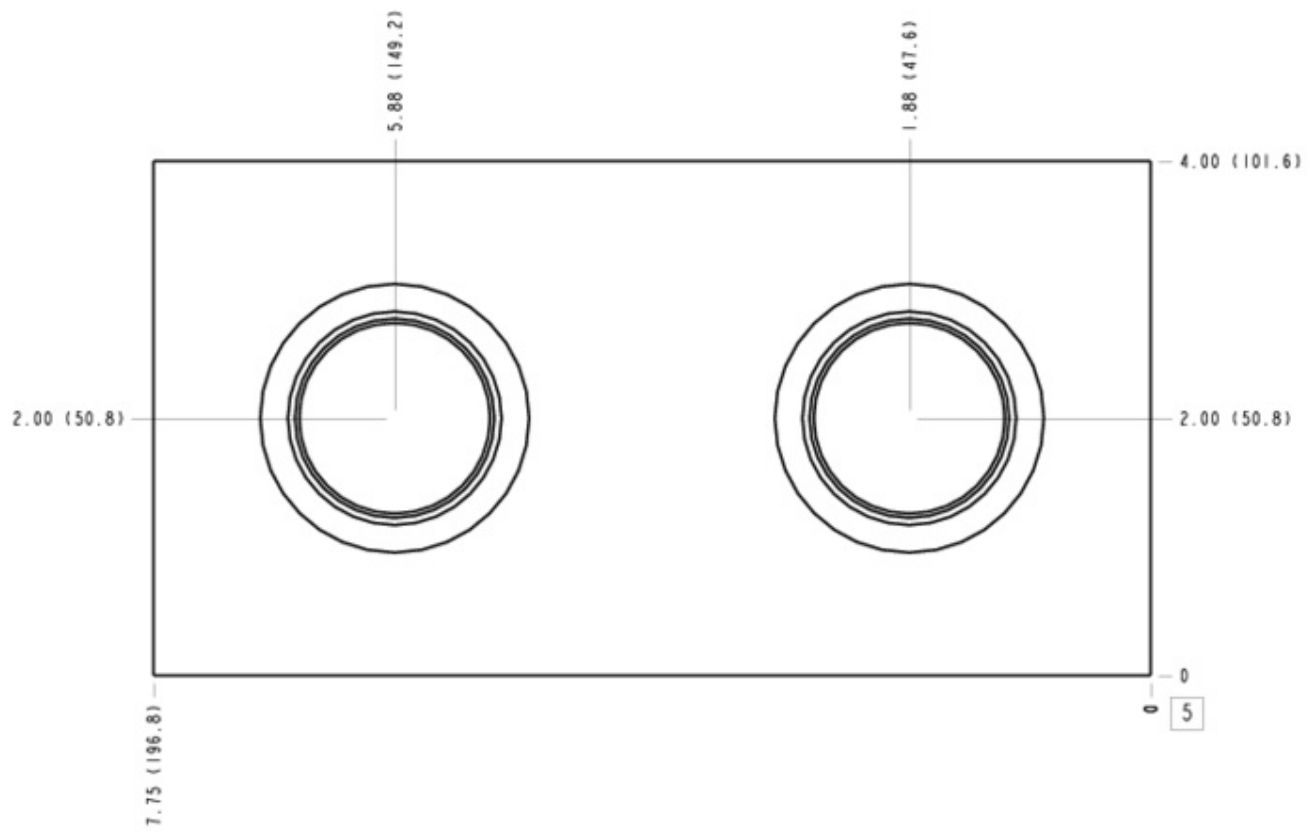


Face 6

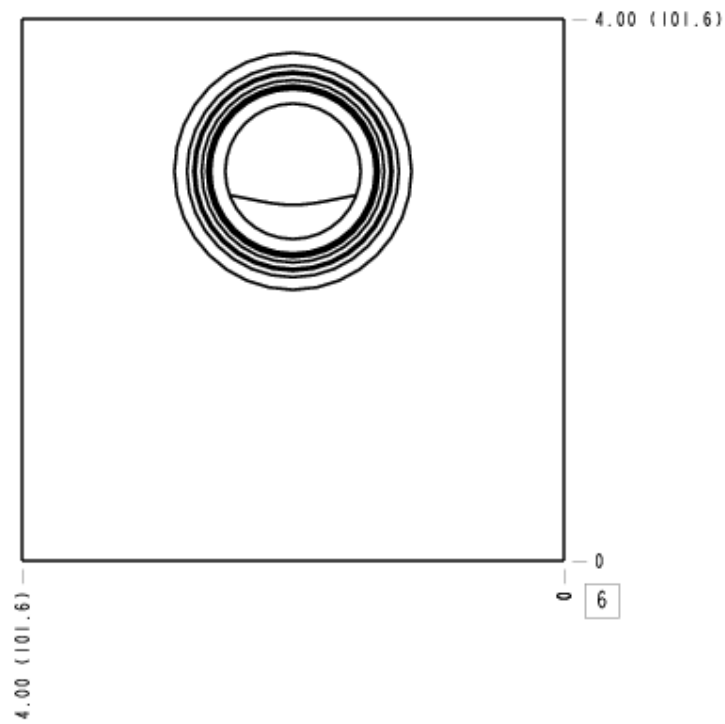

Face 7

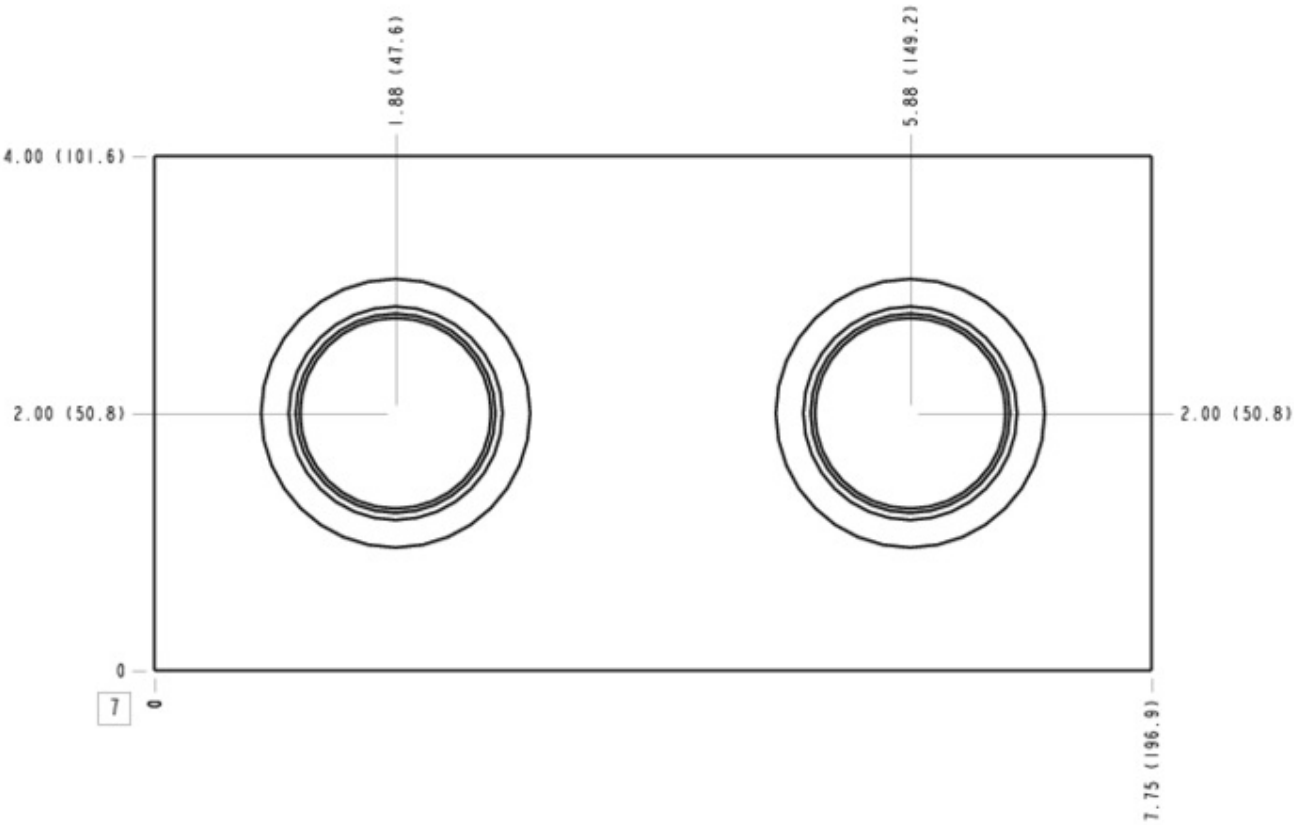

Face 8

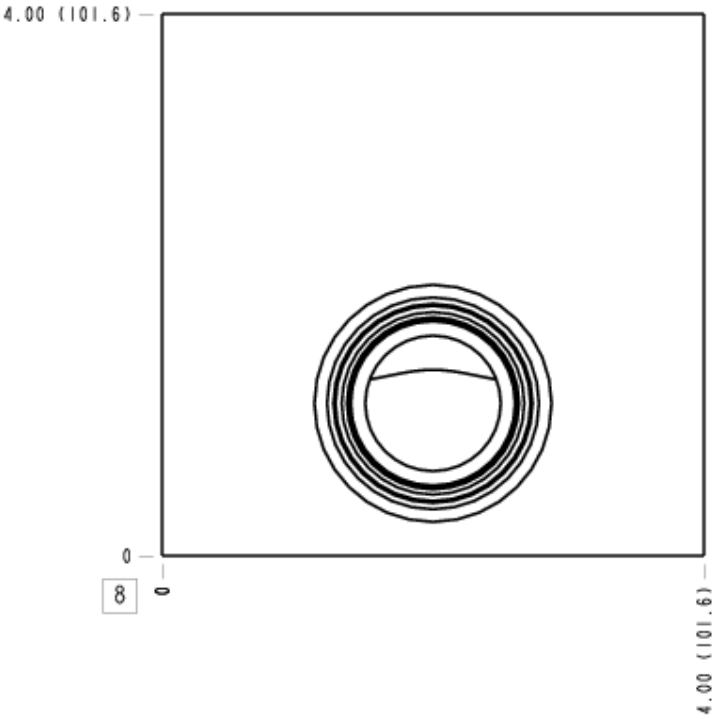

Face 10

