


DIN 24° FDLORX90

Female DIN 'O' ring swivel. 24° cone.

Light series. 90° swept elbow.

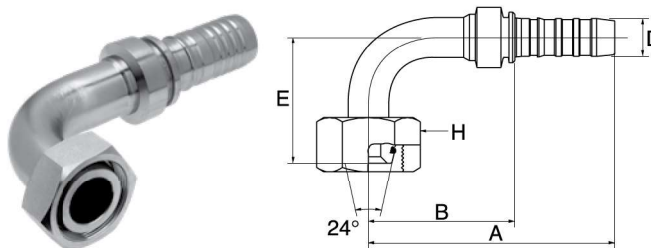

D								
-size	DN	"		A	B	E	H	REF.
				mm	mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	194.6	120.9	92.0	60.0	24GSP42FDLORX90

DIN 24° MDL

Male DIN parallel. 24° inverted cone.

Light series.




D							
-size	DN	"		A	B	H	REF.
				mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	120.0	46.4	55.0	24GSP42MDL

DIN 24° FDHORX

Female DIN 'O' ring swivel. 24° cone.

Heavy series.

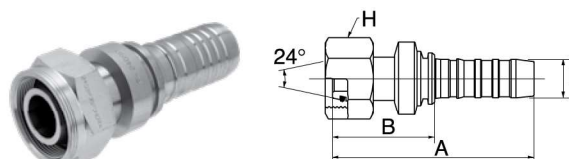

D							
-size	DN	"		A	B	H	REF.
				mm	mm	mm	GSP
-24	40	1.1/2	M52 x 2.0	150.0	76.4	60.0	24GSP38FDHORX

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.