



# Spiral Hose – Non-Braided

- **Light and flexible**
- **Excellent resistance to oils, solvents, and both aqueous and non-aqueous solutions**
- **Long service life with outstanding aging qualities**

CEJN spiral hose is an excellent choice for applications that call for hose to have excellent recoil ability and crimp resistance. It offers high tensile and tear strength and resistance to impacts. The hose is abrasion resistant and is suitable for applications in a wide temperature range.



**Max. working pressure**..... 145 PSI (10 bar)  
**Min. burst pressure**..... 362 PSI (25 bar)  
**Hose material** ..... FDA approved, Ester-based polyurethane

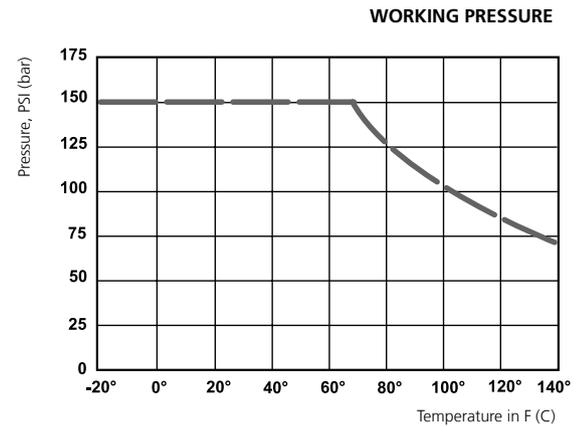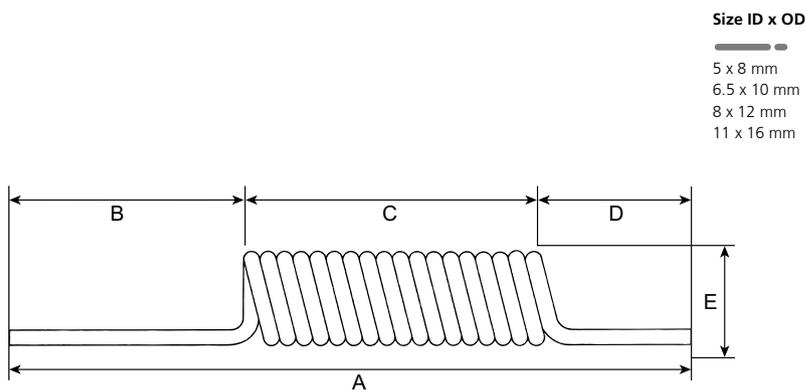

SERVICE LENGTH	ID x OD	Total length	Part No.	A	B	C	D	E
<b>2 METERS</b>	2.5 m	8.2 ft 2.5 m	19 958 5820	740	500	140	100	42
			19 958 6020	740	500	140	100	52
			19 958 6220	740	500	140	100	65
			19 958 6620	720	500	120	100	95
<b>4 METERS</b>	5.0 m	16.4 ft 5.0 m	19 958 5840	930	500	330	100	42
			19 958 6040	930	500	330	100	52
			19 958 6240	920	500	320	100	65
			19 958 6640	880	500	280	100	95
<b>6 METERS</b>	7.5 m	24.6 ft 7.5 m	19 958 5860	1120	500	520	100	42
			19 958 6060	1120	500	520	100	52
			19 958 6260	1100	500	500	100	65
			19 958 6660	1040	500	440	100	95
<b>8 METERS</b>	10.0 m	32.8 ft 10.0 m	19 958 5880	1300	500	700	100	42
			19 958 6080	1310	500	710	100	52
			19 958 6280	1280	500	680	100	65
			19 958 6680	1210	500	610	100	95

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, [www.cejn.com](http://www.cejn.com), for general maintenance tips.