


STANDARD BRACKETS

All the ram hoists are equipped with 2 standard brackets (A - B) suitable for mounting all our industrial pumps.

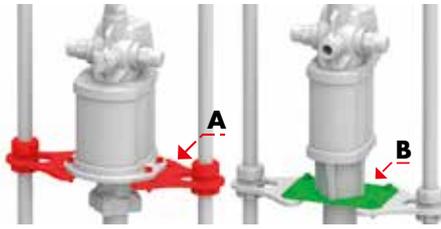


Support with pump positioning clamps.

BRACKETS ON REQUEST

KR1102: Support bracket suitable to mount pump with \varnothing 30 mm suction tube.



Pneumatic control panel.

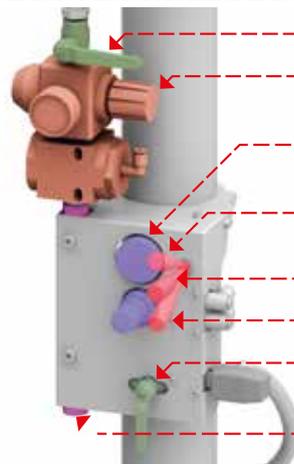

- Pump air feeding ball valve.
- Pressure regulator with manometer for pump air feeding.
- Pressure regulator with manometer for twin column ram air feeding.
- "Follower plate and pump elevator" position.
- "Off" position.
- "Follower plate descent" position.
- Air feeding valve for the following plate lifting.
- Air inlet connection.

P/N OE11/60

Follower plate \varnothing 585 mm with double sealing NBR ring, to be used with air operated twin column ram for drums from 180 to 220 kg. It can be used also with different kind of pumps thanks to special adaptors shown in the below list and available on request.

Compatible fluids: grease and lubricants also with high viscosity, industrial fluids, paints...



- Adaptor to be chosen among those available below.
- Air bleeding valve.
- Air inlet connection for pump lifting.
- Connection for outlet discharge valve.
- NBR double sealing ring.



P/N OE21/61
Adaptor
for pumps with
G 1" (f) suction tube.



P/N OE21/62
Adaptor
for pumps with
G 2" (f) suction tube.



P/N OE21/63
Adaptor + support
(KR1102)
for pumps with
 \varnothing 30 mm suction tube.



P/N OE21/64
Adaptor
for pumps with
 \varnothing 45 mm
suction tube.



P/N OE21/65
Adaptor
for pumps with
 \varnothing 50,8 mm
suction tube.