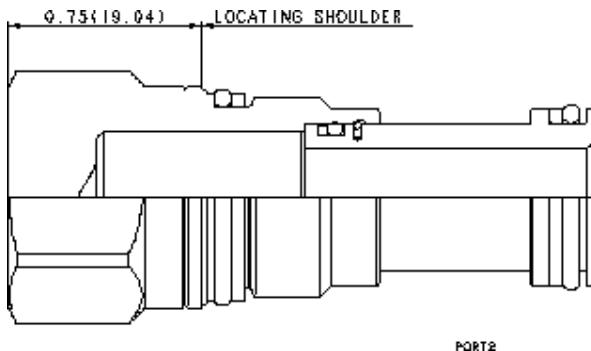




sunhydraulics.com/model/XFCA


CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

This cavity plug blocks all ports.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-10A
Series	1
Maximum Operating Pressure	5000 psi
Port Configuration	2 Port
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990010007
Seal kit - Cartridge	Polyurethane: 990010002
Seal kit - Cartridge	Viton: 990010006
Model Weight	0.20 lb.

CONFIGURATION OPTIONS

Model Code Example: XFCAXXN

CONTROL	(X) ADJUSTMENT RANGE	(X) SEAL MATERIAL	(N) MATERIAL/COATING
X -	X -	N Buna-N E EPDM V Viton	Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see CONFIGURATION section). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

RELATED MODELS

- [XFCAE](#) Port 1 to external port, port 2 blocked cavity plug