

MANUAL with ABS shock proof drum

The ABS S. 4430 manual hose reels present the same advantages of the manual hose reels' family but are easier to handle thanks to the ABS drum that reduces their weight.

bracket
PAINTED
STEEL

bracket
STAINLESS
STEEL

Handiness
and weight



Note: All the hose reels in the table are without hose

Fluid - Pressure	PAINTED STEEL	STAINLESS STEEL	Connection	
	P/N	P/N	inlet	outlet
Air - Water 20 bar - brass swivel joint - Viton® seals	74305/10	74325/10	F 1/2" G	F 1/2" G
Water max 130° C 100 bar - AISI 304 stainless steel swivel joint - Viton® seals	74305/20	74345/20 *	F 1/2" G	F 1/2" G
Water max 130° C 200 bar - AISI 304 stainless steel swivel joint - Viton® seals	74305/30	74345/30	F 3/8" G	F 1/2" G
Water max 130° C 400 bar - AISI 304 stainless steel swivel joint - Teflon® seals	74305/35	74345/35	F 3/8" G	F 1/2" G
Oil and similar 150 bar - galvanized steel swivel joint - "polyurethane" seals	74305/40	-	F 1/2" G	F 1/2" G
Grease 600 bar - galvanized steel swivel joint - "polyurethane" seals	74305/50	74325/50	F 3/8" G	F 1/2" G
Diesel fuel 10 bar - brass swivel joint - Viton® seals	74305/60	74325/60	F 1/2" G	M 1/2" G
			for hoses from 5/8" and 3/4"	


Note: for special fluids see the compatibility table at page 26

* suitable also for oil

Hose reel capacity

ø hose external		Series 4430 ABS
1/4"	14 mm	Length max 40 m
3/8"	17 mm	Length max 18 m
1/2"	20 mm	Length max 15 m
5/8"	21 mm	Length max 12 m
3/4"	27 mm	Length max 8 m

Overall dimensions (mm)

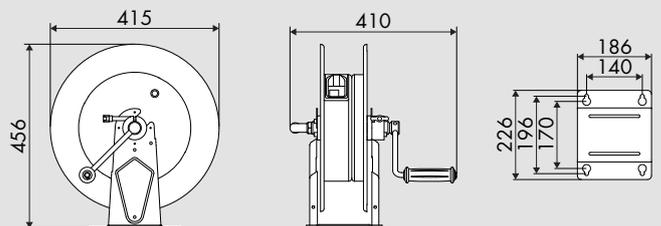

No.1 packing m³ 0,110 kg 9