


COUPLINGS FOR WIRE AND TEXTILE BRAIDED HOSES GLOBALSPIRAL PLUS

THE WORLD OF COUPLINGS

SAE FL45

SAE 'O' ring flange. Code 61.
45° swept elbow.

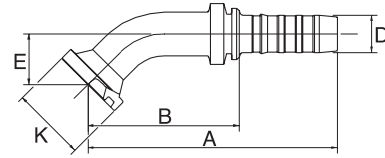


									
D				A	B	E	K	KIT	REF.
-size	DN	"		mm	mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	202.0	128.6	38.0	60.3	24 PA-FL	24GSP24FL45S
-24	40	1.1/2	2"	200.0	126.3	52.0	71.4	32 PA-FL	24GSP32FL45S
-32	50	2	2"	257.0	165.0	66.0	71.4	32 PA-FL	32GSP32FL45-066

Details on flange kits see page 292. / S: Short drop per ISO 12151-3.

SAE FL60

SAE 'O' ring flange. Code 61.
60° swept elbow.

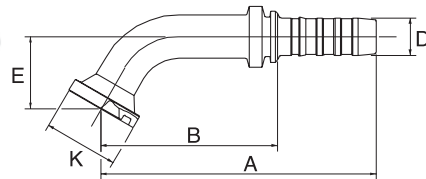


									
D				A	B	E	K	KIT	REF.
-size	DN	"		mm	mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	231.0	157.5	53.0	60.3	24 PA-FL	24GSP24FL60S

Details on flange kits see page 292. / S: Short drop per ISO 12151-3.

SAE FL90

SAE 'O' ring flange. Code 61.
90° swept elbow.

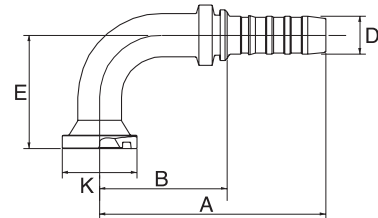

									
D				A	B	E	K	KIT	REF.
-size	DN	"		mm	mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	184.0	109.9	81.0	60.3	24 PA-FL	24GSP24FL90S
-24	40	1.1/2	2"	175.0	101.9	80.0	71.4	32 PA-FL	24GSP32FL90-080
-32	50	2	2"	222.0	130.1	114.0	71.4	32 PA-FL	32GSP32FL90-114

Details on flange kits see page 292. / S: Short drop per ISO 12151-3.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.