

Spiral Anti-Spark Hose – Non-Braided

- Spark and scorch resistant
- Excellent resistance to oils, solvents, and other non-aqueous solutions
- Long service life with outstanding aging qualities



CEJN spiral anti-spark hose is resistant to scorching and damage due to exposure to sparks that are present in welding environments or where cutting equipment is in use. Its excellent recoil ability and outstanding aging qualities make it ideal for assembly lines and fixed workplaces. The hose can also be used for breathing air applications.

See the CEJN Breathing Air Product Range for more information.



Max. working pressure..... 145 PSI (10 bar)
 Min. burst pressure..... 362 PSI (25 bar)
 Hose material Ester-based polyurethane

Size ID x OD
 6.5 x 10 mm
 8 x 12 mm

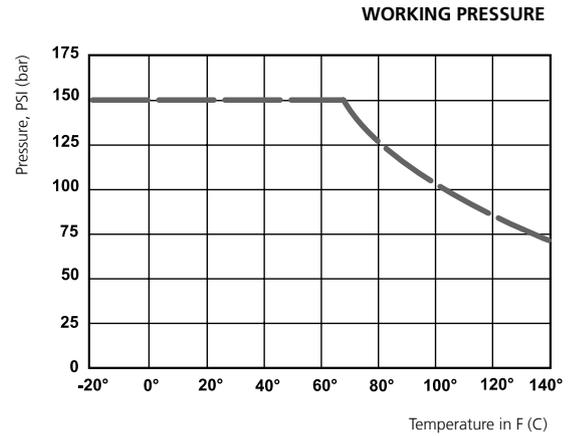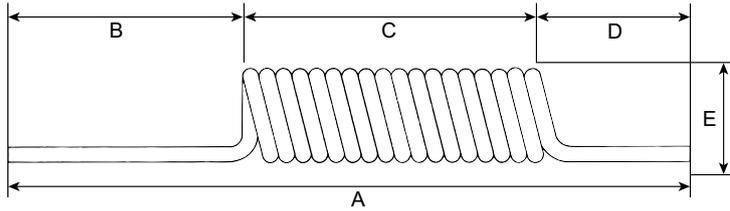

SERVICE LENGTH	ID x OD	Total length	Part No.	A	B	C	D	E
2 M	2.5 m	8.2 ft 2.5 m	19 958 4020	740	500	140	100	52
			19 958 4220	740	500	140	100	65
4 M	5.0 m	16.4 ft 5.0 m	19 958 4040	930	500	330	100	52
			19 958 4240	920	500	320	100	65
6 M	7.5 m	24.6 ft 7.5 m	19 958 4060	1120	500	520	100	52
			19 958 4260	1100	500	500	100	65
8 M	8.0 m	26.2 ft 8.0 m	19 958 4080	1310	500	710	100	52
			19 958 4280	1280	500	680	100	65

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.com, for general maintenance tips.