
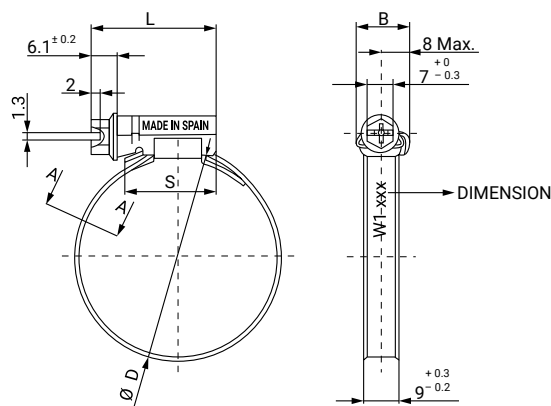




Thanks to the exclusive design of the housing and the high-strength screw, the ASFA L Worm-Drive Clip has excellent performance while being at the same time very compact.

The cold-formed stamped 9 mm band, smoothed on the underside, combined with the bevelled band edges protects the hose from any damage.

DIN 3017. The ASFA LW1 hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

MATERIAL: Band and support: W1
Galvanized steel DIN 1.0935
Bolt: Steel Qst 36-3
DIN 1.0214

FINISH: Bolt: Zinc plated Cr3

CORROSION RESISTANCE: 144 hours salt spray
(ASTM B-117)

Ø Application mm	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
8-12 (*)	03008745	18,5	0,65	9,2	11,5	15,0	15	200	1.600
8-16	03008753	22,1	0,65	10,5	14,0	15,0	45	200	800
12-22	03008761	22,1	0,65	10,5	14,0	15,0	45	200	800
16-27	03008770	23,6	0,75	10,5	14,0	16,5	42	200	800
20-32	03008788	23,6	0,75	10,5	14,0	16,5	36	200	800
25-40	03008796	25,6	0,75	10,5	14,0	17,1	32	100	400
30-45	03008809	25,6	0,75	10,5	14,0	17,1	28	100	800
32-50	03008817	25,6	0,75	10,5	14,0	17,1	24	100	800
40-60	03008825	25,6	0,75	10,5	14,0	17,1	19	100	400
50-70	03008833	29,6	0,75	10,5	14,0	21,1	17	100	100
60-80	03008841	29,6	0,75	10,5	14,0	21,1	15	100	100
70-90	03008850	29,6	0,75	10,5	14,0	21,1	13	50	400
80-100	03008868	29,6	0,75	10,5	14,0	21,1	11	50	50
90-110	03008876	29,6	0,75	10,5	14,0	21,1	10	25	200
100-120	03008884	29,6	0,75	10,5	14,0	21,1	9	25	200
110-130	03008892	29,6	0,75	10,5	14,0	21,1	8	25	25
120-140	03008905	29,6	0,75	10,5	14,0	21,1	7	25	25
130-150	03008913	29,6	0,75	10,5	14,0	21,1	6	25	25
140-160	03008921	29,6	0,75	10,5	14,0	21,1	5	25	25

(*) ASFA-L 7 mm