



Cable ties polyamide 6.6 standard

T-Series in PA66 natural and black

T-Series cable ties for bundling and securing of cables, pipes and hoses. These cable ties can be used for nearly all kind of applications.

Features and benefits

- Available in a wide range of materials and sizes
- High tensile strength with very low insertion force
- Only high quality plastic is used meeting recycling targets
- Inside serrated cable ties for a strong hold onto bundles
- Ergonomic bent tail offers quick and simple installation
- Easy application either manually or with an application tool




Standard T-Series cable ties – for almost any type of application.

Material specifications: See Article-No. on our website.



T-Series

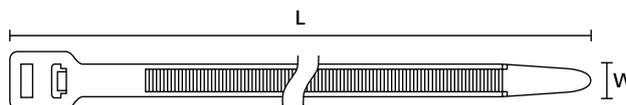

T250-series

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Pack Cont.	Tools	Article-No.
T18S	2.3	83.0	16.0	80	PA66	Natural (NA)	1000 pcs.	1-2;4-5;25	111-02809
T18R	2.5	100.0	22.0	80	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-01910
	2.5	100.0	22.0	80	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-01919
T18I	2.5	145.0	35.0	80	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-02370
	2.5	145.0	35.0	80	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-02319
T18L	2.5	205.0	50.0	80	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-02110
	2.5	205.0	50.0	80	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-02119
T25L	2.8	240.0	65.0	110	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-02500
	2.8	240.0	65.0	110	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-02519
T25LL	2.8	330.0	95.0	110	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-02619
T30R	3.5	150.0	35.0	135	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-03210
	3.5	150.0	35.0	135	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-03009
T30L	3.5	198.0	50.0	135	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-03410
	3.5	198.0	50.0	135	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-03419
T30LL	3.5	290.0	80.0	135	PA66	Black (BK)	100 pcs.	1-2;4-5;25	111-03500
	3.5	290.0	80.0	135	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-03529
T40R	4.0	175.0	40.0	180	PA66	Natural (NA)	100 pcs.	1-2;4-5;25	111-01626
T50S	4.6	150.0	35.0	225	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-05810
	4.6	150.0	35.0	225	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05819

Recommended Tools: 1=MK10-SB, 2=MK20, 3=MK21, 4=MK3PNSP2, 5=EVO7i, 6=ProCut 9 no battery, 7=EVO9i, 9=EVO9iHT, 10=MK9P, 25=EVOcut. For more information on toolings please refer to the Application Tooling chapter on page 593.

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.
N = Minimum Loop Tensile Strength for Cable Ties (newton)




Please note: Some or all of the products listed here have these approvals, or have one or more sustainable attributes. Please see our website for the latest details.



Cable ties polyamide 6.6 standard

T-Series in PA66 natural and black

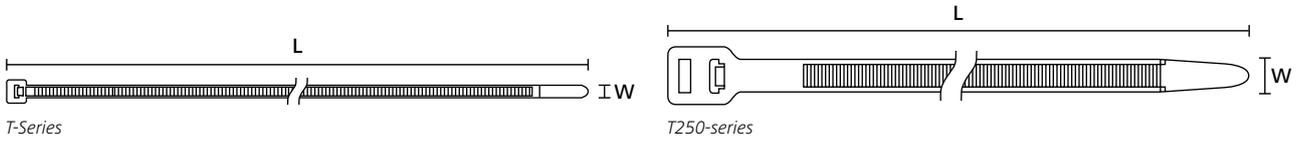

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Pack Cont.	Tools	Article-No.
T50R	4.6	200.0	50.0	225	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-05000
	4.6	200.0	50.0	225	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05013
T50M	4.6	245.0	65.0	225	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-06200
	4.6	245.0	65.0	225	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-06201
T50I	4.6	300.0	85.0	225	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-05210
	4.6	300.0	85.0	225	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05219
T50L	4.6	390.0	110.0	225	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-05400
	4.6	390.0	110.0	225	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05409
T80R	4.7	205.0	55.0	355	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-08010
	4.7	205.0	55.0	355	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05019
T80I	4.7	305.0	85.0	355	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-08210
	4.7	305.0	85.0	355	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-08229
T80L	4.7	390.0	110.0	355	PA66	Black (BK)	100 pcs.	1-2;4-7;25	111-05410
	4.7	390.0	110.0	355	PA66	Natural (NA)	100 pcs.	1-2;4-7;25	111-05419
T120S	7.6	225.0	55.0	535	PA66	Natural (NA)	50 pcs.	1;3;6-7;9-10;25	111-12829
T120I	7.6	300.0	80.0	535	PA66	Black (BK)	100 pcs.	1;3;6-7;9-10;25	111-12210
	7.6	300.0	80.0	535	PA66	Natural (NA)	100 pcs.	1;3;6-7;9-10;25	111-12219
T150R	7.6	365.0	100.0	670	PA66	Black (BK)	100 pcs.	1;3;6-7;9-10;25	111-14810
	7.6	365.0	100.0	670	PA66	Natural (NA)	100 pcs.	1;3;6-7;9-10;25	111-14819
T120R(E)	7.6	387.0	100.0	535	PA66	Black (BK)	100 pcs.	1;3;6-7;9-10;25	111-12010
	7.6	387.0	100.0	535	PA66	Natural (NA)	100 pcs.	1;3;6-7;9-10;25	111-12019
T120M	7.6	460.0	125.0	535	PA66	Black (BK)	100 pcs.	1;3;6-7;9-10;25	111-12610
	7.6	460.0	125.0	535	PA66	Natural (NA)	100 pcs.	1;3;6-7;9-10;25	111-12619
T120XM	7.6	600.0	175.0	535	PA66	Black (BK)	50 pcs.	1;3;6-7;9-10;25	111-12701
	7.6	600.0	175.0	535	PA66	Natural (NA)	50 pcs.	1;3;6-7;9-10;25	111-12704
T120L	7.6	760.0	225.0	535	PA66	Black (BK)	50 pcs.	1;3;6-7;9-10;25	111-12403
	7.6	760.0	225.0	535	PA66	Natural (NA)	50 pcs.	1;3;6-7;9-10;25	111-12429
T150M	8.9	530.0	150.0	780	PA66	Black (BK)	25 pcs.	1;6-7;9-10	111-00124
	8.9	530.0	150.0	780	PA66	Natural (NA)	25 pcs.	1;6-7;9-10	111-15619
T150L	8.9	820.0	245.0	780	PA66	Black (BK)	25 pcs.	1;6-7;9-10	111-15405
	8.9	820.0	245.0	780	PA66	Natural (NA)	25 pcs.	1;6-7;9-10	111-15419
T150XL	8.9	1095.0	330.0	780	PA66	Black (BK)	25 pcs.	1;6-7;9-10	111-15500
	8.9	1095.0	330.0	780	PA66	Natural (NA)	25 pcs.	1;6-7;9-10	111-15519

Recommended Tools: 1=MK10-SB, 2=MK20, 3=MK21, 4=MK3PNSP2, 5=EVO7i, 6=ProCut 9 no battery, 7=EVO9i, 9=EVO9iHT, 10=MK9P, 25=EVOcut. For more information on toolings please refer to the Application Tooling chapter on page 593.

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available. N = Minimum Loop Tensile Strength for Cable Ties (newton)



Please note: Some or all of the products listed here have these approvals, or have one or more sustainable attributes. Please see our website for the latest details.



Cable ties polyamide 6.6 standard

T-Series in PA66 natural and black

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Pack Cont.	Tools	Article-No.
T150XLL	8.9	1325.0	405.0	780	PA66	Black (BK)	25 pcs.	1;6-7;9-10	111-15300
T250R	12.4	515.0	125.0	1115	PA66	Natural (NA)	25 pcs.	6-7;9-10	111-24803
T250M	12.4	565.3	150.0	1115	PA66	Black (BK)	25 pcs.	6-7;9-10	111-25001
	12.4	565.3	150.0	1115	PA66	Natural (NA)	25 pcs.	6-7;9-10	111-25002
T250I	12.4	730.0	203.0	1115	PA66	Natural (NA)	25 pcs.	6-7;9-10	111-25219
T250L	12.4	880.0	254.0	1115	PA66	Black (BK)	25 pcs.	6-7;9-10	111-24601
T250XL	12.4	1030.0	305.0	1115	PA66	Black (BK)	25 pcs.	6-7;9-10	111-25200
T250X	12.5	370.0	100.0	1115	PA66	Black (BK)	100 pcs.	6-7;9-10	111-25102

Recommended Tools: 1=MK10-SB, 2=MK20, 3=MK21, 4=MK3PNSP2, 5=EVO7i, 6=ProCut 9 no battery, 7=EVO9i, 9=EVO9iHT, 10=MK9P, 25=EVOcut. For more information on toolings please refer to the Application Tooling chapter on page 593.

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

N = Minimum Loop Tensile Strength for Cable Ties (newton)



Please note: Some or all of the products listed here have these approvals, or have one or more sustainable attributes. Please see our website for the latest details.