


COUPLINGS FOR WIRE SPIRAL HYDRAULIC HOSES GLOBALSPIRAL MAXIMUM

THE WORLD OF COUPLINGS

BSP FBSPORX

Female BSP 'O' ring swivel. 60° cone.

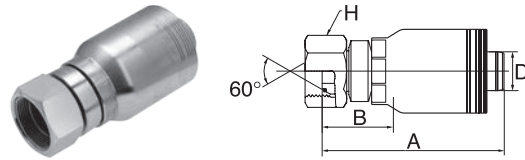


D				A	B	H	REF.
-size	DN	"		mm	mm	mm	GSM
-24	40	1.1/2	G 1.1/2" - 11 BSP	154.0	59.0	55.0	24GSM24FBSPORX
-32	50	2	G 2" - 11 BSP	184.0	70.0	70.0	32GSM32FBSPORX

-24 size is 35.0 MPa (5000 psi); -32 size is 28.0 MPa (4000 psi).

BSP FBSPORX45

Female BSP 'O' ring swivel. 60° cone.
45° swept elbow.

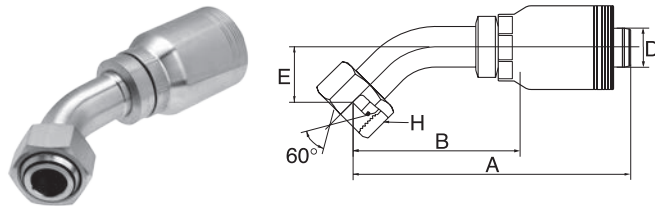


								
D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSM
-24	40	1.1/2	G 1.1/2" - 11 BSP	242.5	147.5	49.7	55.0	24GSM24FBSPORX45
-32	50	2	G 2" - 11 BSP	307.6	193.6	75.0	70.0	32GSM32FBSPORX45

-24 size is 35.0 MPa (5000 psi); -32 size is 28.0 MPa (4000 psi).

BSP FBSPORX90

Female BSP 'O' ring swivel. 60° cone.
90° swept elbow.

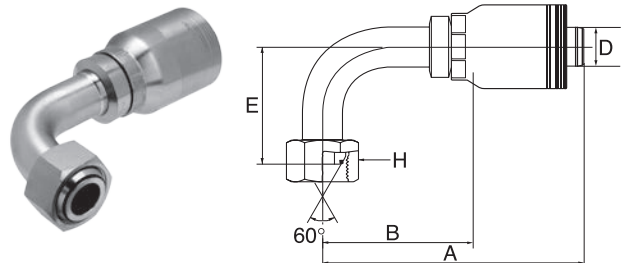

								
D				A	B	E	H	REF.
-size	DN	"		mm	mm	mm	mm	GSM
-24	40	1.1/2	G 1.1/2" - 11 BSP	222.6	127.6	100.0	55.0	24GSM24FBSPORX90
-32	50	2	G 2" - 11 BSP	276.5	162.5	150.0	70.0	32GSM32FBSPORX90

-24 size is 35.0 MPa (5000 psi); -32 size is 28.0 MPa (4000 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.