


DIN EN 14420-7 Camlock Fittings

Camlock Unions AISI 316

Male Camlock coupling, male BSPT threaded Type F

Stainless Steel AISI 316

Page: 1/1

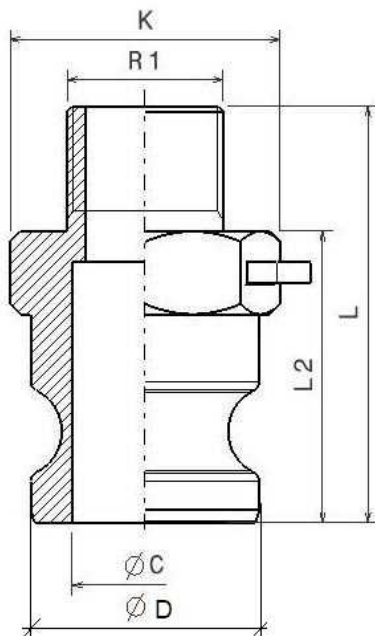

Norms: Male thread according to EN10226-1
Female thread according to ISO 228-1

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part nº	DN	R1	L	L2	ØC	K	D
ZF012	12	1/2"	48	33	16	25	24
ZF015	20	1/2"	56	38	21	32	32
ZF020	20	3/4"	56	38	21	32	32
ZF025	25	1"	72	48	24	40	37
ZF032	32	1"1/4	80	56	28,5	48	45
ZF040	40	1"1/2	84	60	36	56	54
ZF050	50	2"	88	62	45	67	63
ZF065	65	2"1/2	100	69	56,5	83	76
ZF080	80	3"	106	73	73	96	92
ZF100	100	4"	114	78	98	127	100

The dimensions in micro-casting parts are approximated in those elements without mechanization.