
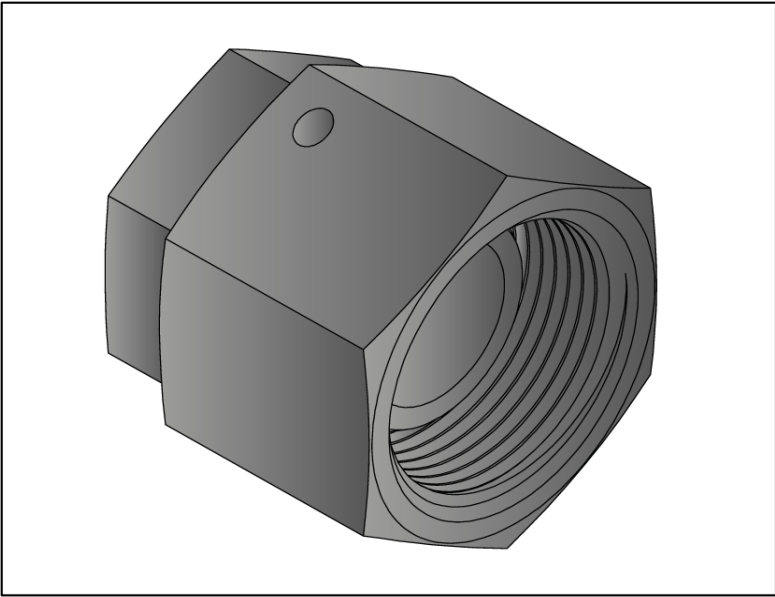


VSTO-DKR
BSPP-IG-einstellbar 60° Dichtkonus - *BSPP-f-swivel 60° cone end*

- Verschlussstopfen mit 60° Dichtkonus
- Gewinde: BSPP
- ISO 8434-6 / BS 5200

- *blanking plug with 60° cone end*
- *thread: BSPP*
- *ISO 8434-6 / BS 5200*

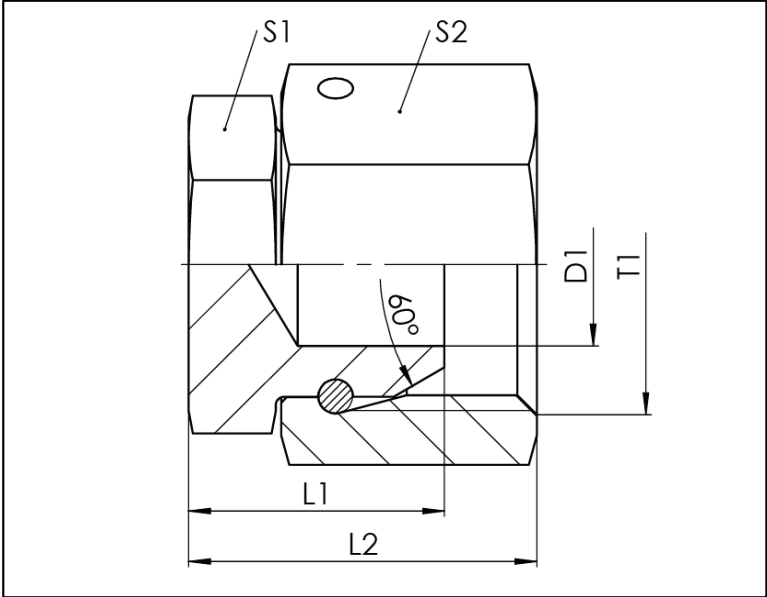

VSTO-DKR										
Dash	T1	D1 mm	L1 mm	L2 mm	S1 mm	S2 mm	PN bar	Gewicht weight g	Bezeichnung Name	Artikel-Nr. Article No.
-2	1/8-BSPP	3,5	13,5	17,5	11	14	400	32	VSTO DKR 1/8	204470
-4	1/4-BSPP	4	18	23,5	12	17	400	67	VSTO DKR 1/4	204471
-6	3/8-BSPP	7	18	24	17	22	400	109	VSTO DKR 3/8	204472
-8	1/2-BSPP	10	21,5	28	19	27	400	180	VSTO DKR 1/2	204473
-10	5/8-BSPP	13	21	30,5	22	30	250	225	VSTO DKR 5/8	204474
-12	3/4-BSPP	15	23,5	32	27	32	250	276	VSTO DKR 3/4	204475
-16	1-BSPP	21	24	34,7	32	41	200	467	VSTO DKR 1	204476
-20	1.1/4-BSPP	28	29,5	39,5	41	50	200	771	VSTO DKR 1.1/4	204477
-24	1.1/2-BSPP	32	32	43	46	55	200	997	VSTO DKR 1.1/2	204478
-32	2-BSPP	45	36	48	60	70	100	1680	VSTO DKR 2	204479

Technische Änderungen vorbehalten / *Subject to technical alteration*